A flow is selected based on the content of the message. In this example, you can route based on the value of the message or its type. You've already seen that with pattern matching on the message.

6.4.2 State-based routing

The state-based routing approach involves changing the routing behavior based on the state of the router, as you've seen in the photo processor (figure 6.9). You can easily route depending on the state by using the finite state machine capabilities of any behavior.

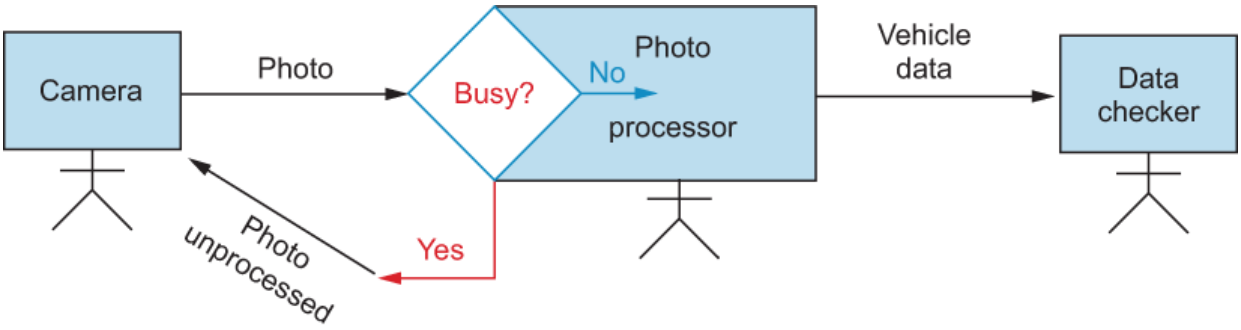


Figure 6.9 Photo processor routing depending on the state

The following is a sketch of the photo processor processing photos when it is available or sending them back to the camera when it is not:

```
object PhotoProcessorSketch {

  val key = ServiceKey[String]("photo-procesor-sketch-key")

  sealed trait Command
  final case class File(
     location: String,
     camera: ActorRef[Camera.Photo])
    extends Command
  final case object Done extends Command
```