important requirements of a configuration system is providing a way to target multiple environments (such as development, testing, and production) without having to explode the bundle. This chapter shows how that's done, as well.

7.1 Trying out Akka configuration

Like other Akka libraries, the Typesafe Config library takes pains to minimize the dependencies that are needed; it has no dependencies on other libraries. Let's start with a quick tour of how to use the configuration library.

The library uses a hierarchy of properties. Figure 7.1 shows a possible configuration of an application defining four properties using a self-defined hierarchy. The properties are grouped within the `MyAppl` node: `version`, `name`, and `database` (`MyAppl` is also a property).

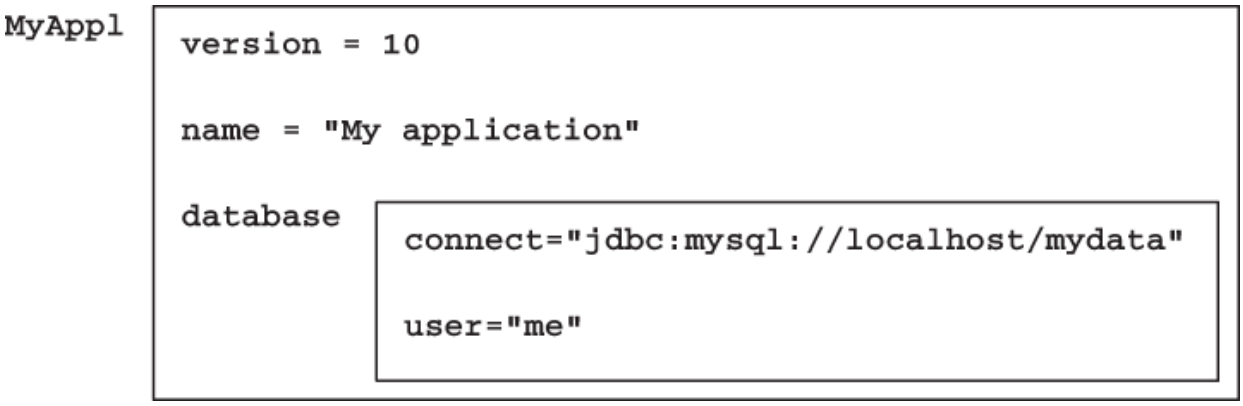


Figure 7.1 Configuration example

The `ConfigFactory` is used to get the configuration. This is often called within the `Main` class of your application. The library also