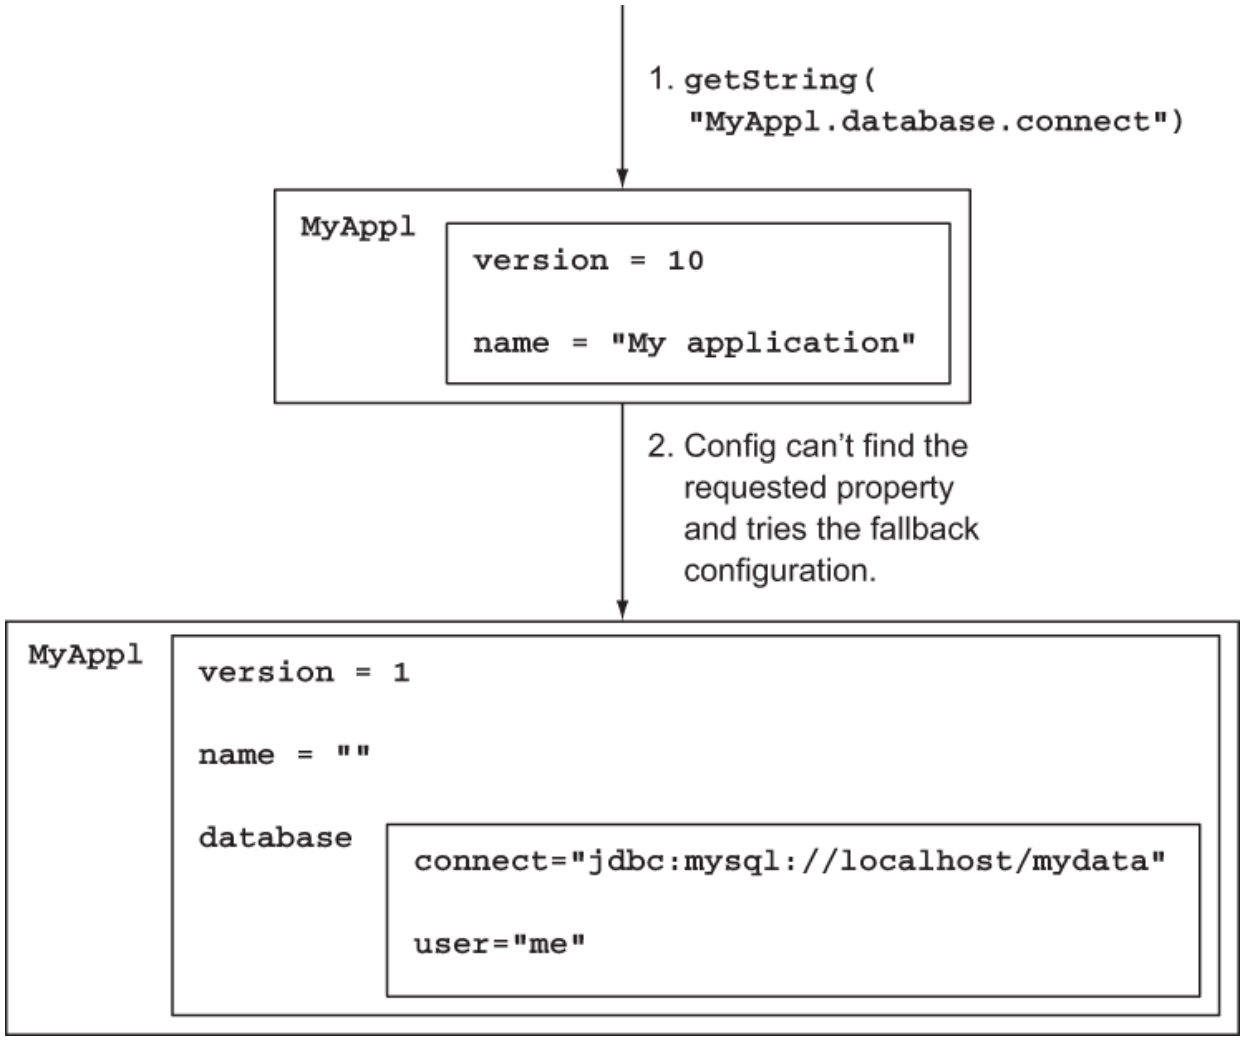


Figure 7.2 Configuration fallback

Preventing null properties

The defaulting mechanism prevents cases where values differ depending on where they're used. Given this principle, when a configuration property is read, the value should always be set. If the framework allowed the property to be empty, the code would behave differently based on how (and where) configuration was done. So, if you try to get a config value from the configuration that isn't set, an exception is thrown.