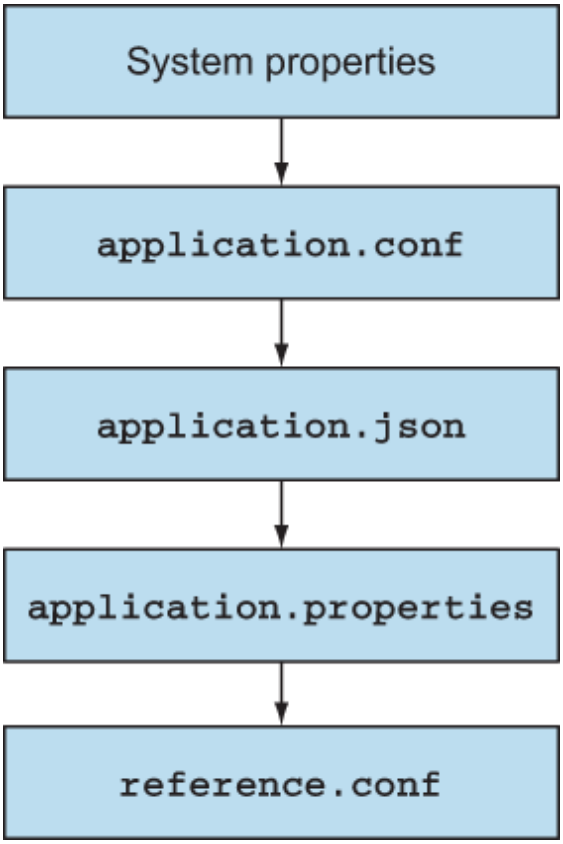


Figure 7.5 Priority of the configuration fallback structure. The highest priority is at the top, which overrides definitions in lower files.

These two approaches can also be mixed by lifting, using `.parseString` as the lifted configuration and then reverting to the default configuration: for example, application-test.conf, if it exists. If it does not, the `ActorTestKit` looks for application.conf, and so on. Here's how you lift with `.parseString` and fall back to the default configuration:

```
val config: Config = ConfigFactory.parseString("""
  akka.loglevel = DEBUG
  akka.log-config-on-start = on
  """).withFallback(ConfigFactory.load())
```