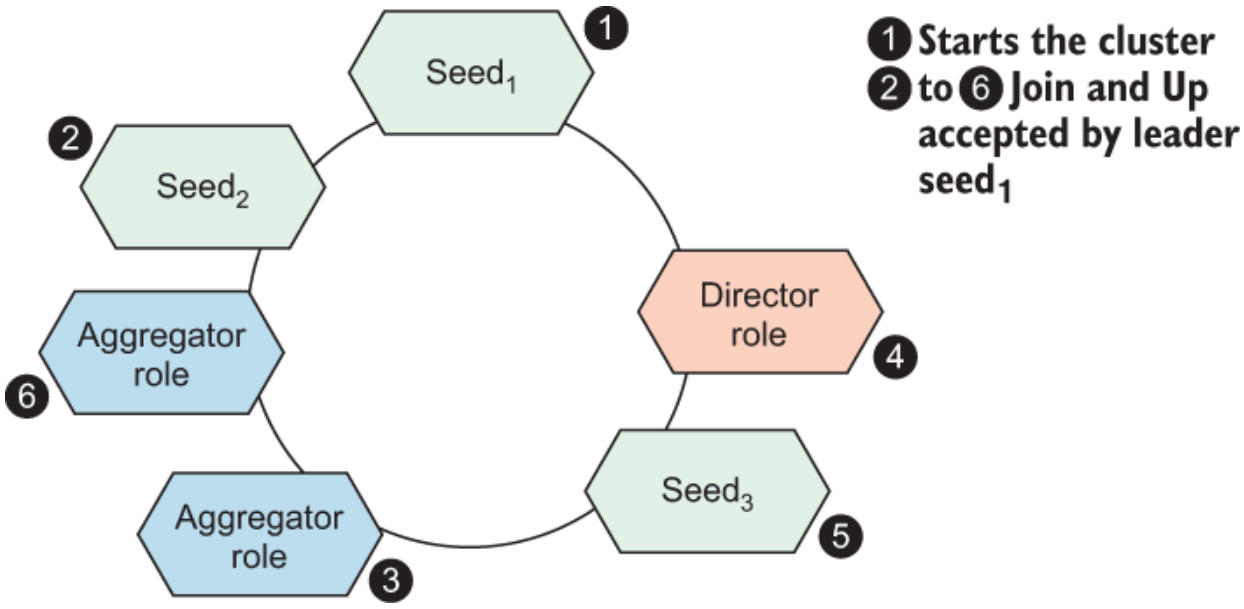


Figure 8.4 Cluster formation from pure seeds, and joining of nodes with actors containing business logic

8.2.2 Minimal cluster example

Let's start with creating seed nodes via the REPL console to give you better insight into how a cluster is formed. To be clear, you wouldn't perform these steps manually if you were setting up a cluster application; this example shows how to interact with the cluster at a low level to better understand the primitives.

The only things you need are an `ActorSystem` and some configuration. We begin with the configuration because in this case, the `ActorSystem` is created in the REPL.

The `ActorSystem` needs to be configured to use the cluster module. Listing 8.1 shows a minimal configuration setting the seed nodes. The configuration requires you to select the following: