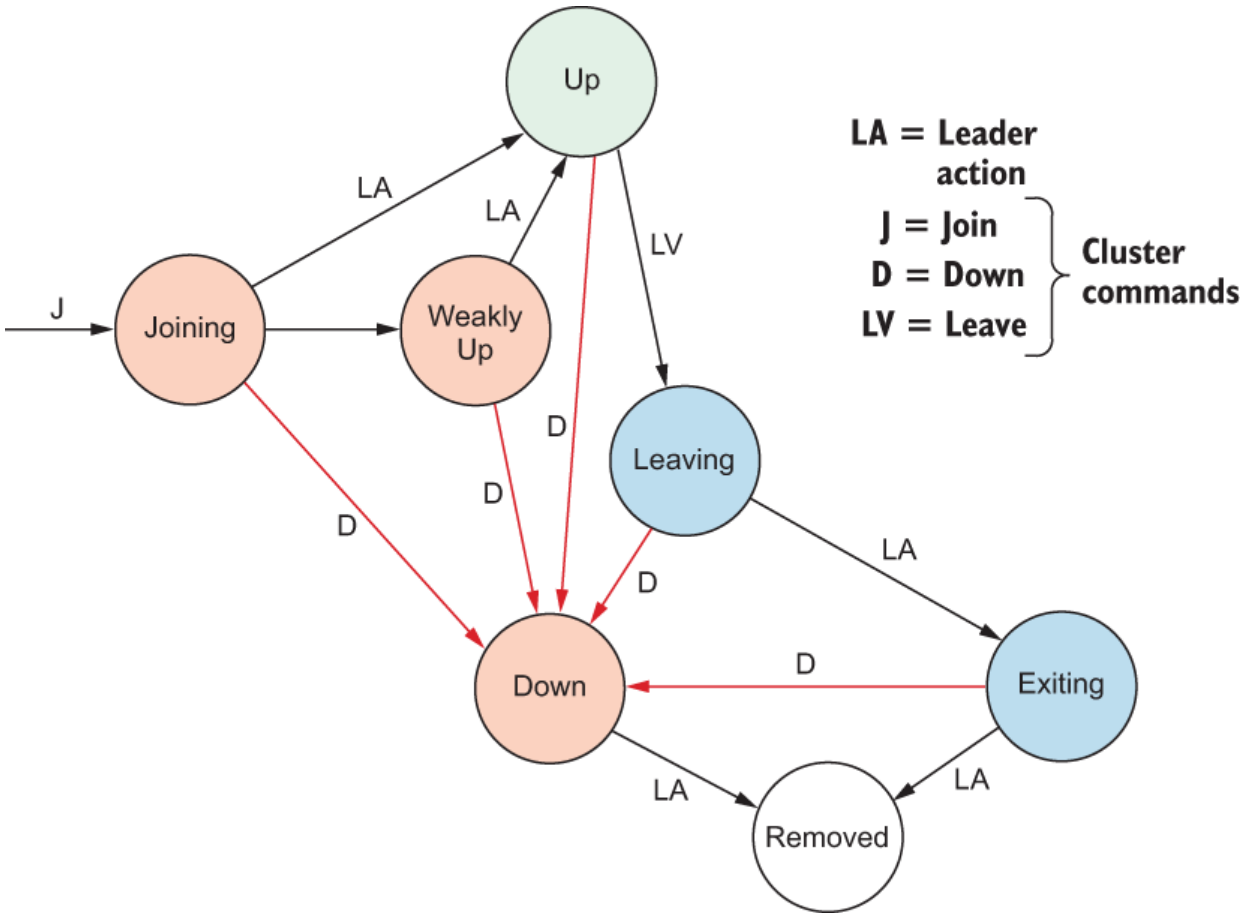


Figure 8.7 Finite state machine of cluster states

8.2.4 Leaving the cluster

Let's send a `ClusterCommand` to make the leader (node 1) leave the cluster. When this happens, the next node—the one with the lowest IP address—takes over the role of leader. Press Enter to return to the sbt console, and in node 1's terminal, create an address to reference node 1 and send a `Leave` to the cluster manager:

```
scala> import akka.cluster.typed.{ Cluster, Leave }

scala> val address = Cluster(guardian).selfMember.uniqueAddress.address    ❶
address: akka.actor.Address = akka://words@127.0.0.1:2551
```