```
scala> Cluster(guardian).manager ! akka.cluster.typed.Leave(address)      ❷
Cluster Node [akka://words@127.0.0.1:2551] - Marked address
➥[akka://words@127.0.0.1:2551] as [Leaving]                              ❸
Cluster Node [akka://words@127.0.0.1:2551] - Leader is moving node
➥[akka://words@127.0.0.1:2551] to [Exiting]                              ❹
Cluster Node [akka://words@127.0.0.1:2551] - Shutting down... Cluster Node
➥[akka://words@127.0.0.1:2551] - Successfully shut down
```

❶ Gets the address for this node

❷ Forces seed node 1 to leave the cluster

❸ Marked as Leaving by itself

❹ Marked as Exiting by itself

In the output, you can see that node 1 marks itself as `Leaving` and then `Exiting` while still being the leader. These state changes are propagated to all nodes in the cluster. Then the cluster node is shut down while the `ActorSystem` continues to run. This is shown in figure 8.8.

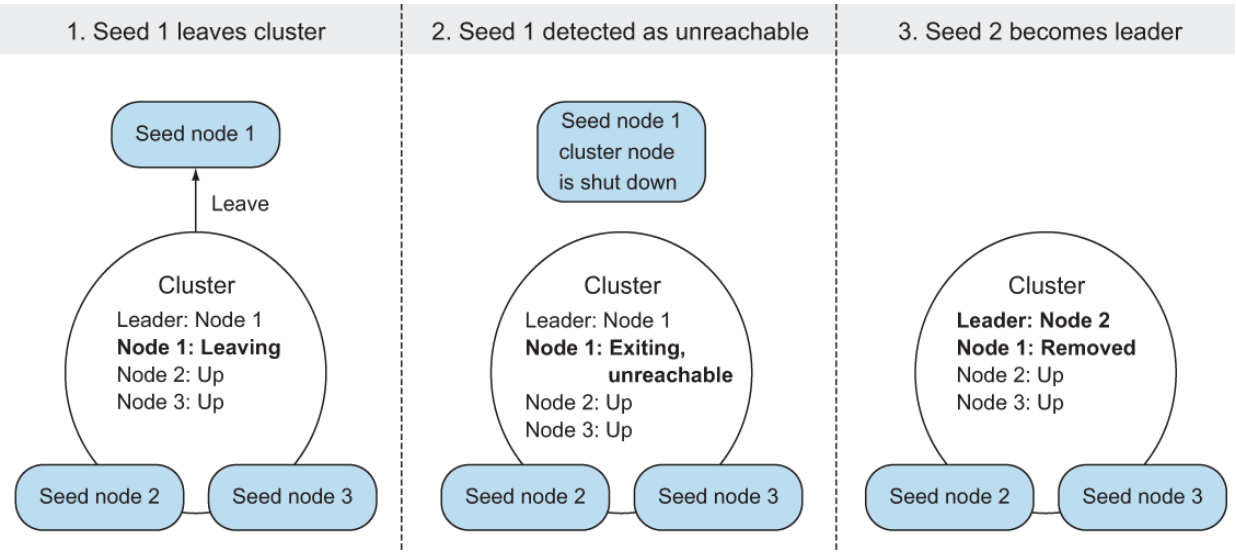


Figure 8.8 The first seed node leaves the cluster.