Each text is sent from the master to a random worker, which processes it by counting the occurrences of each word in the text. The worker node processes each text asynchronously, resulting in faster processing, and sends the result of the count back to the master, which summarizes the work. The idea is to divide and conquer in the context of a resilient application. This is shown again in figure 8.10.

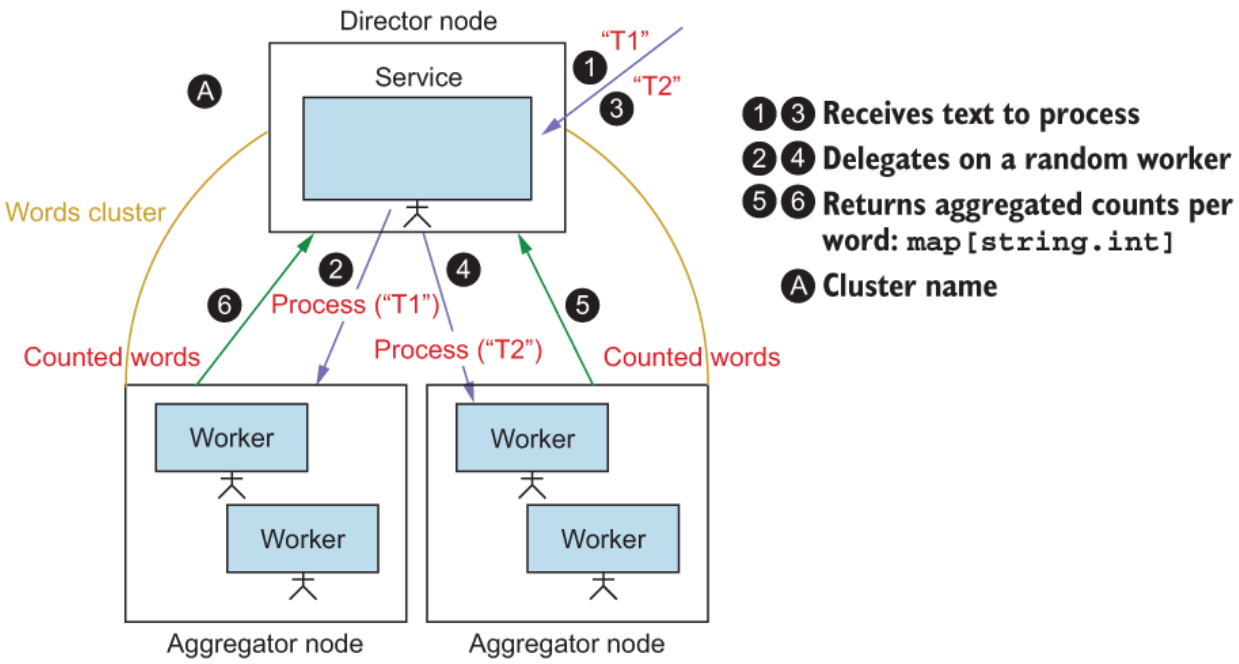


Figure 8.10 Actors and main flow

Depending on the node's role, a master is created on a director node, and the workers are created on the aggregator nodes. When a director node starts, it creates a master actor and a router that can communicate with each registered worker. The master uses this router to delegate each text to each worker. To simplify the example, the master produces a text every second instead of pulling data from a source such as a topic or a queue as it would in a real application.