Figure 8.12 shows the business logic of a worker. The following sections cover the steps in detail, from starting the cluster to distributing the work to testing the application's resilience in case of a crashed aggregator node.

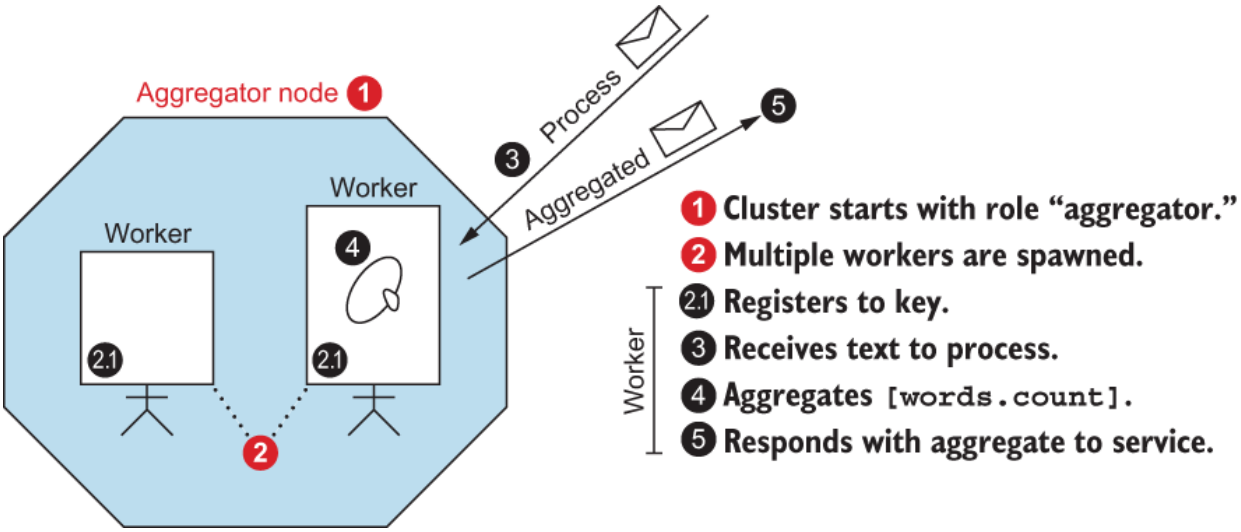


Figure 8.12 Worker business logic

Some caveats for the example

In this example, it is assumed that the error is due not to the content of the message but rather to the lack of communication. If a worker cannot process a message because of the content, the situation is handled by supervision—and that would not illustrate the main topic of this chapter. The troubleshooting we are concerned with here is resilience through clustering.

8.4.1 In practice

To see the logic between the master and the workers at runtime, let's look at the logs of the director node where the master is running. When the workers reach Up status, a master is created and sends