the seed-nodes URI in the configuration.

9.1.4 Rebalancing configuration

To deploy a shard rather than test it, you choose and set the number of shards with `akka.cluster.sharding.number-of-shards`. The optimal value is 10 times the number of nodes, because with 10 shards per node, the shard-to-node ratio remains reasonably balanced when a new node is added. For example, if you planned five nodes with two shards each, adding a new node would result in one node rebalancing only one of the two shards and the other four nodes not rebalancing at all (see figure 9.3).

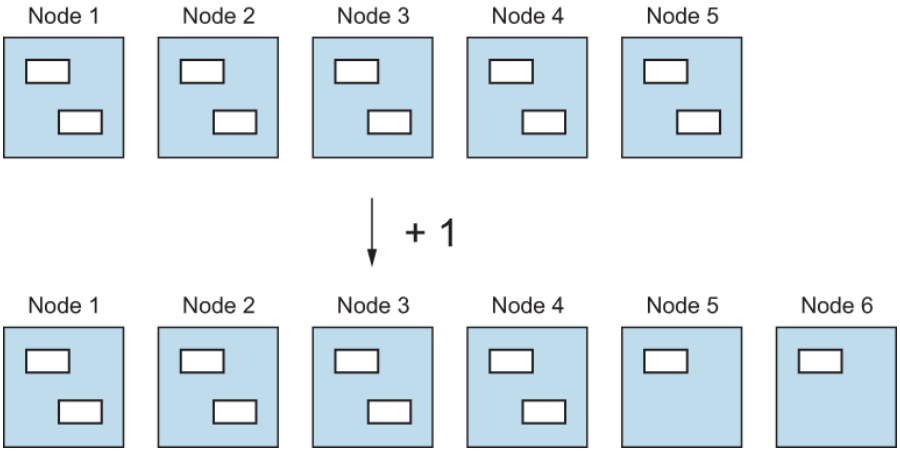


Figure 9.3 Rebalancing shards after adding a new node (shard region)

On the other hand, with 10 shards per node, as shown in figure 9.4, you have at most a 10% difference in load between nodes when you add a new node. Of course, the same is true for the loss of nodes.

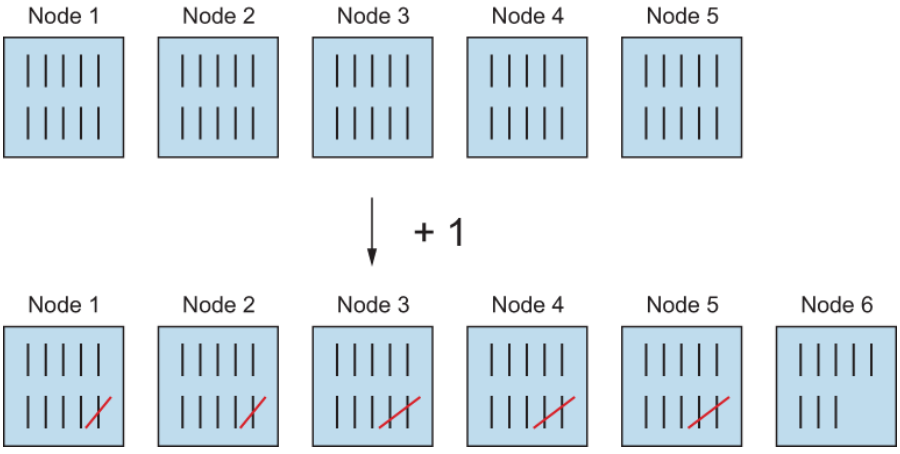


Figure 9.4 Ten shards per node (shard region)