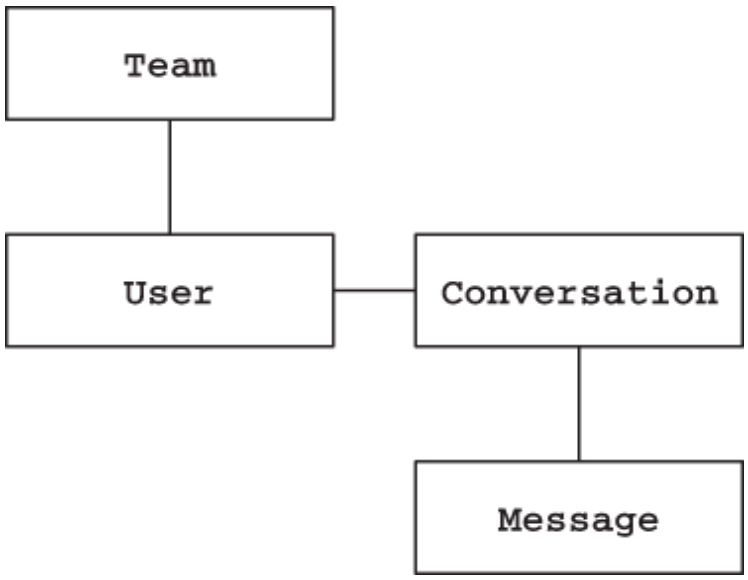


Figure 1.3 Data model design

A `Team` object is a group of `Users`, and many `Users` can be part of a `Conversation`. `Conversation` objects are collections of `Messages`. So far, so good.

You flesh out the application's behavior and build a web-based user interface (UI). You're at the point where you can show the application to prospective users and give demos. The code is simple and easy to manage. But so far, the application only runs in memory, so whenever it's restarted, all conversations are lost. It can also only run on one server. Your web app UI built with [insert shiny new JavaScript library] is so impressive that stakeholders want to immediately go live, even though you repeatedly warn that it's just for demo purposes. Time to move to more servers and set up a production environment.

1.4.1 Traditional scaling and durability: Moving everything to the database