You decide to add a database to the equation. You have plans to run the web application on two front-end web servers for availability, with a load balancer in front of the application. Figure 1.4 shows the new setup.

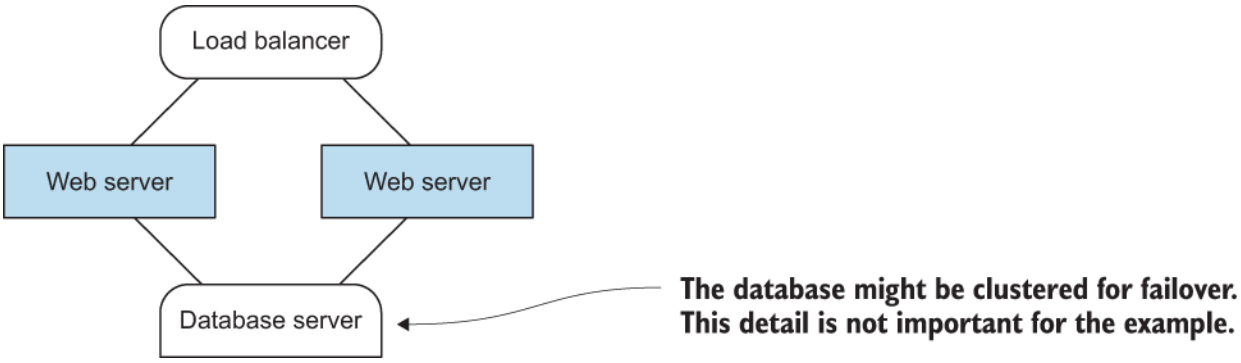

Figure 1.4 Load balancer/failover

The code is becoming more complex: you can't just work with in-memory objects anymore, because how would you keep the objects consistent on the two servers? Someone on your team says, "We need to go stateless!" You remove all feature-rich objects and replace them with database code.

The state of the objects no longer resides in memory on the web servers, which means the methods on the objects can't work on the state directly; essentially, all important logic moves to database statements. The change is shown in figure 1.5.