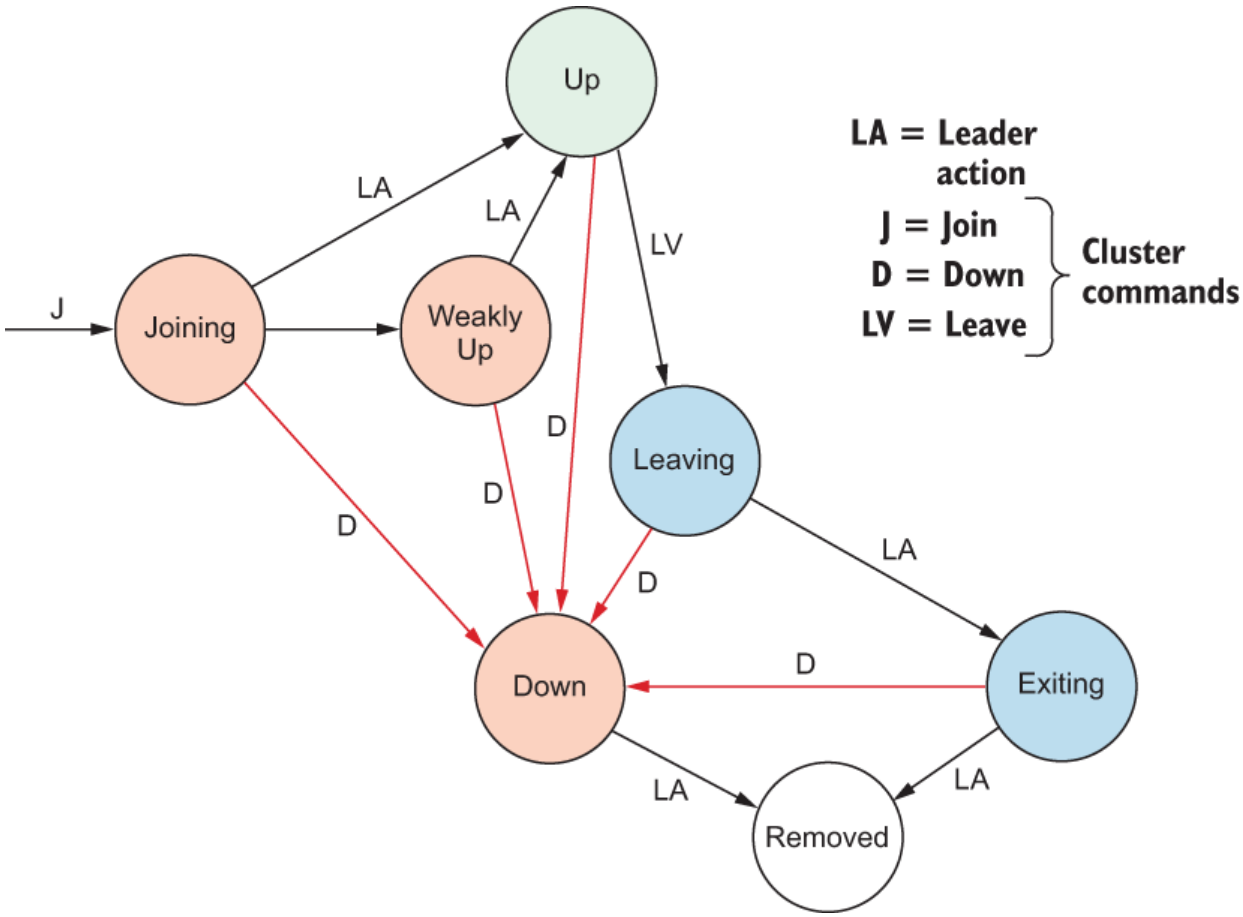


Figure 13.1 Cluster states

As you can see, there is no unreachable state. On the one hand, there is an unreachable event: `Cluster.MemberUnreachable`, which is of the same type as `ClusterEvent.MemberJoined` or `ClusterEvent.MemberUp`. On the other hand, there is an `unreachable` tag. When a node receives this event, it updates its view of the cluster and adds this tag. Let's take an example where a cluster consisting of three nodes is divided into two parts by a network partition, as shown in figure 13.2.