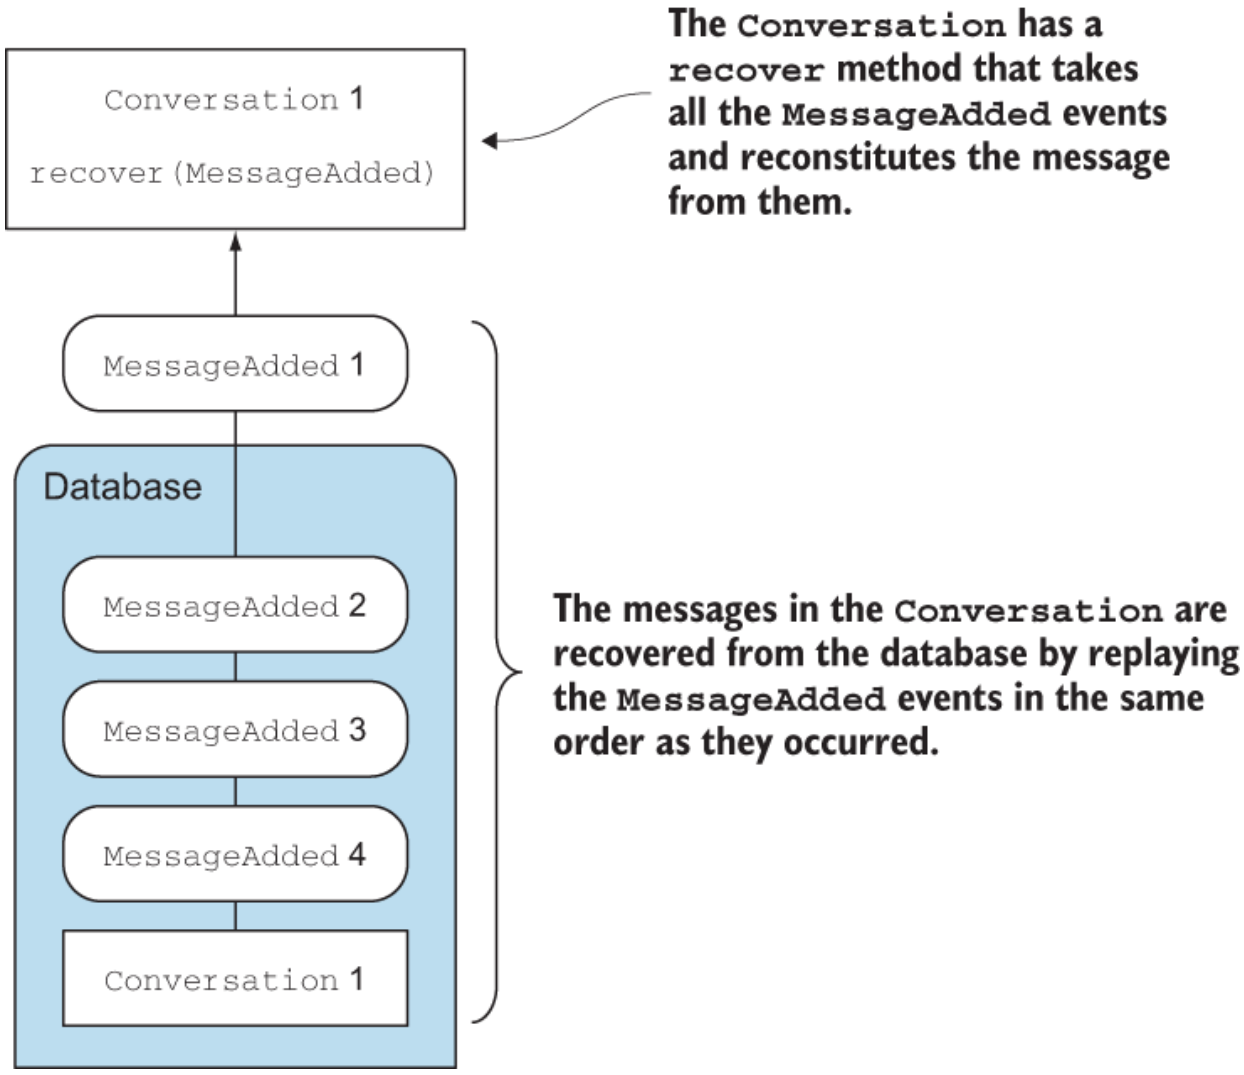


Figure 1.10 Recovering conversations

You'll learn how this process works in chapter 9. But as you can see, you only use the database to recover the messages in the conversation. You don't use it to express your code in database operations. The `Conversation` actor sends messages to the log and receives them again on startup. You don't have to learn anything new; you're just sending and receiving messages.

KEEPING CHANGES AS A SEQUENCE OF EVENTS