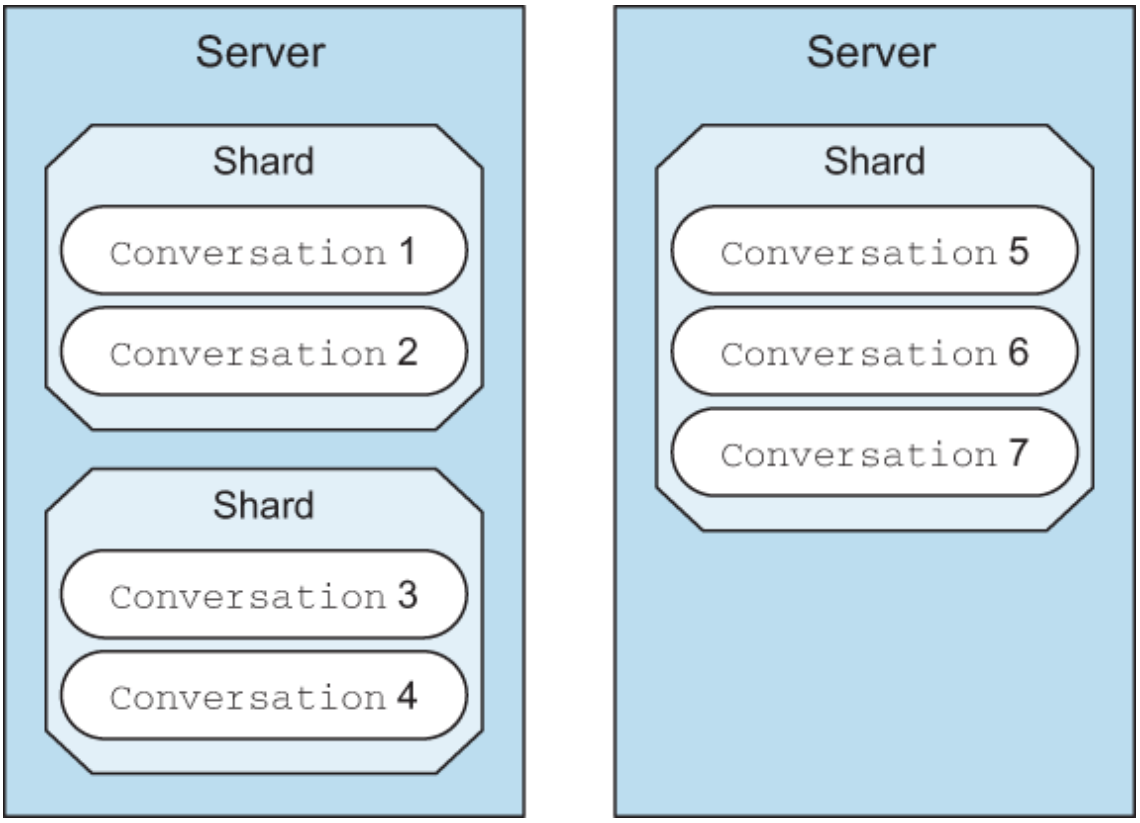


Figure 1.11 Sharding

You can keep using the simple in-memory model of conversations if you have a generic event-sourced journal and a way to indicate how conversations should be partitioned. Many details about these two capabilities are covered in chapters 9 and 15. For now, let's assume that you can use these services.

1.5.2 Scaling with Akka and interactive use: Pushing messages

Instead of polling the database for every web application user, you can notify the user of an important change (an event) by directly sending messages to the user's web browser. The application can also send event messages internally as signals to execute particular