tasks. Every object in the application sends an event when something interesting occurs. Other objects in the application can decide whether an event is interesting and take action on it, as shown in figure 1.12.

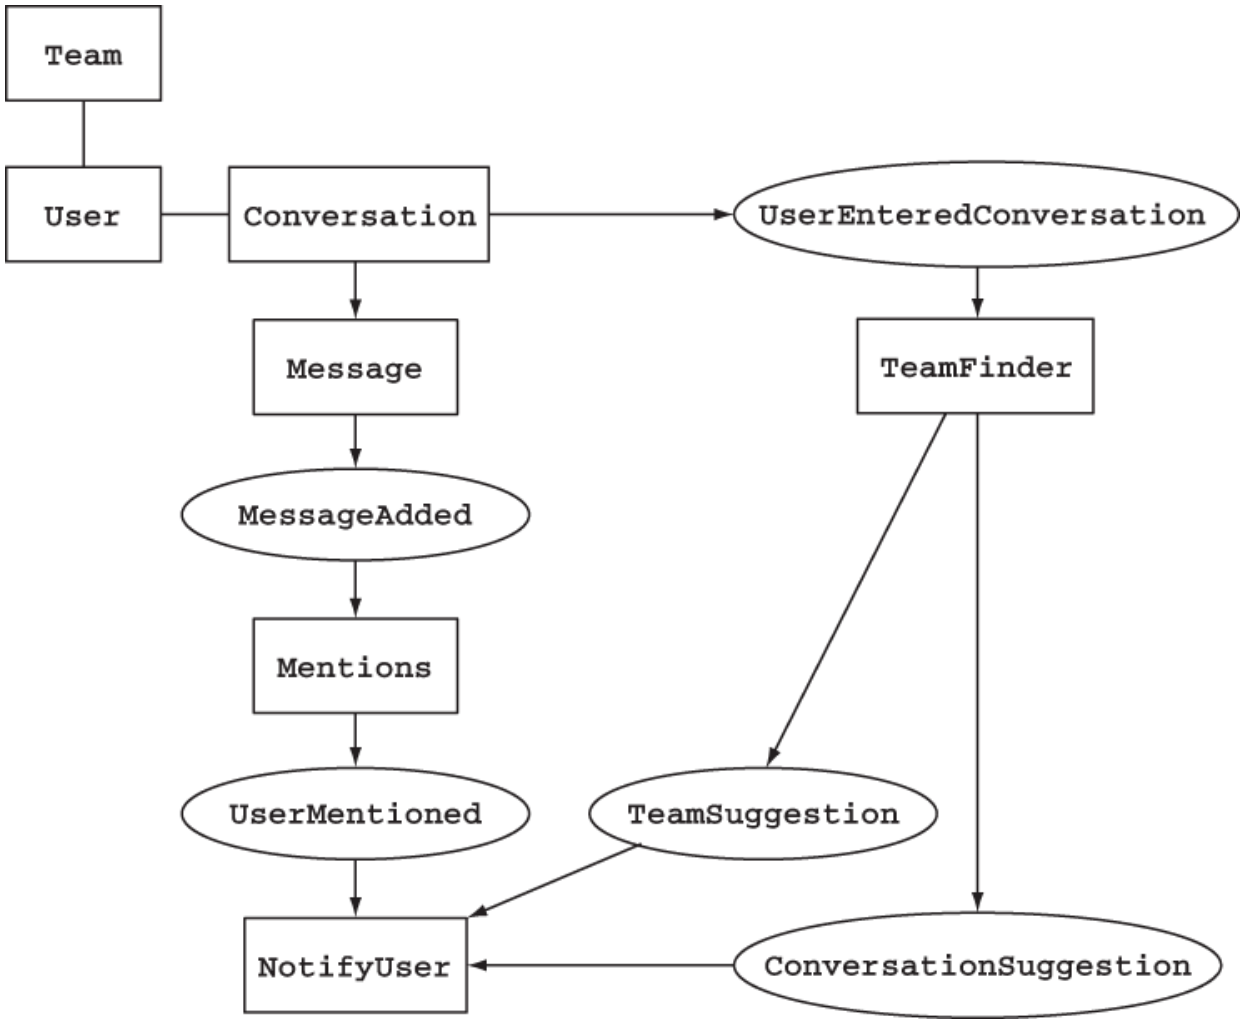


Figure 1.12 Events

The events (depicted as ellipses) decouple the system where there used to be undesired coupling between the components. The `Conversation` actor only publishes that it added a `Message` and continues its work. Events are sent through a publish-subscribe