mapAsyncUnordered

If the events you are processing do not require an order and can have different processing times, you will benefit from this operator. For example, suppose you call the database, and the query has different response times depending on the processing element. With `mapAsyncUnordered`, the queries that take longer will not block the pipe. The stream processes the faster queries first, and once they are done, it can send the result to the next stage and pick a new element.

The greater the difference in processing time, the greater the performance difference with `mapAsyncUnordered`. Figure 16.1 shows how `mapAsyncUnordered` removes faster elements from the stage and makes room for new elements.

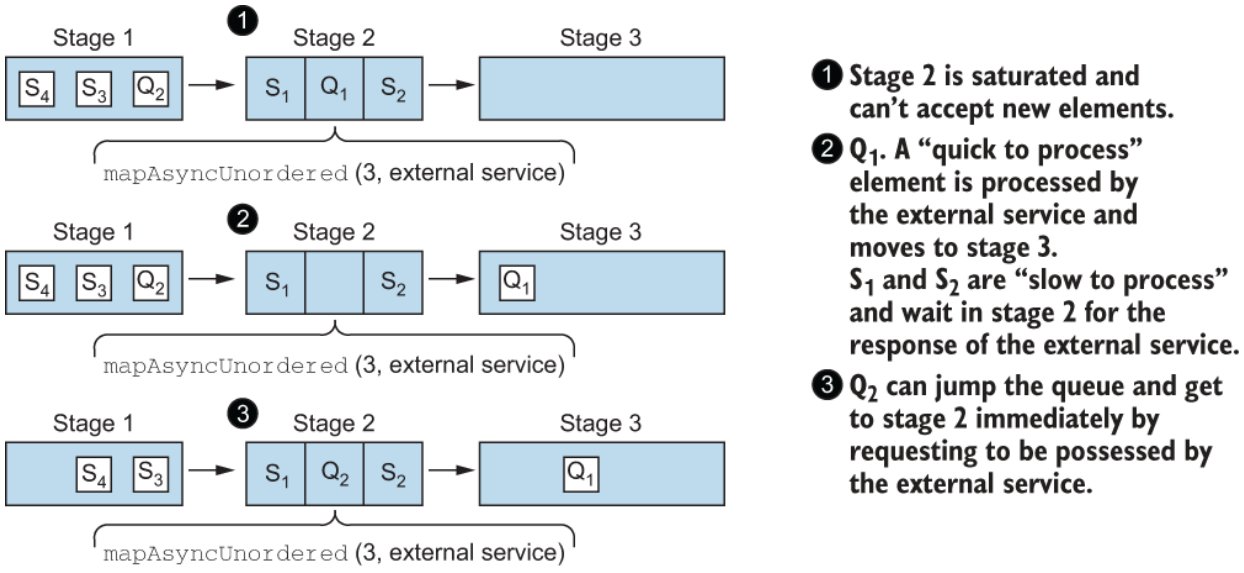


Figure 16.1 `mapAsyncUnordered` allowing new elements to be processed