```
    return false;
}
```

#A When the document loads, add an event listener to intercept the form submission
#B Suppress the default form behavior
#C Call our API function with the values from the form

4.1.3 Serving the HTML from the same origin

If you try to load the HTML file directly in your web browser from the file system to try it out, you'll find that nothing happens when you click the submit button. If you open the JavaScript Console in your browser (from the View menu in Chrome, select Developer and then JavaScript Console), you'll see an error message like that shown in figure 4.2. The request to the Natter API was blocked because the file was loaded from a URL that looks like `file:///Users/neil/natter-api/src/main/resources/public/natter.api`, but the API is being served from a server on `https://localhost:4567/`.

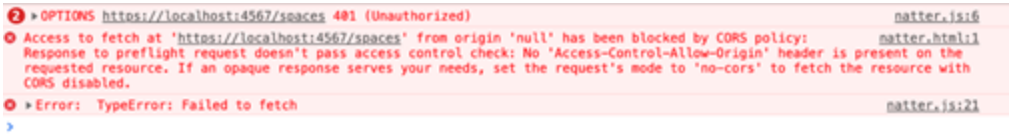


Figure 4.2 An error message in the JavaScript console when loading the HTML page directly. The request