> **TIP** Static files are copied during the Maven compilation process, so you will need to rebuild and restart the API using `mvn clean compile exec:java` to pick up any changes to these files.

Once you have configured Spark and restarted the API server you will be able to access the UI from https://localhost:4567/natter.html. Type in any value for the new space name and owner and then click the Submit button. Depending on your browser, you will be presented with a screen like that shown in figure 4.3 prompting you for a username and password.

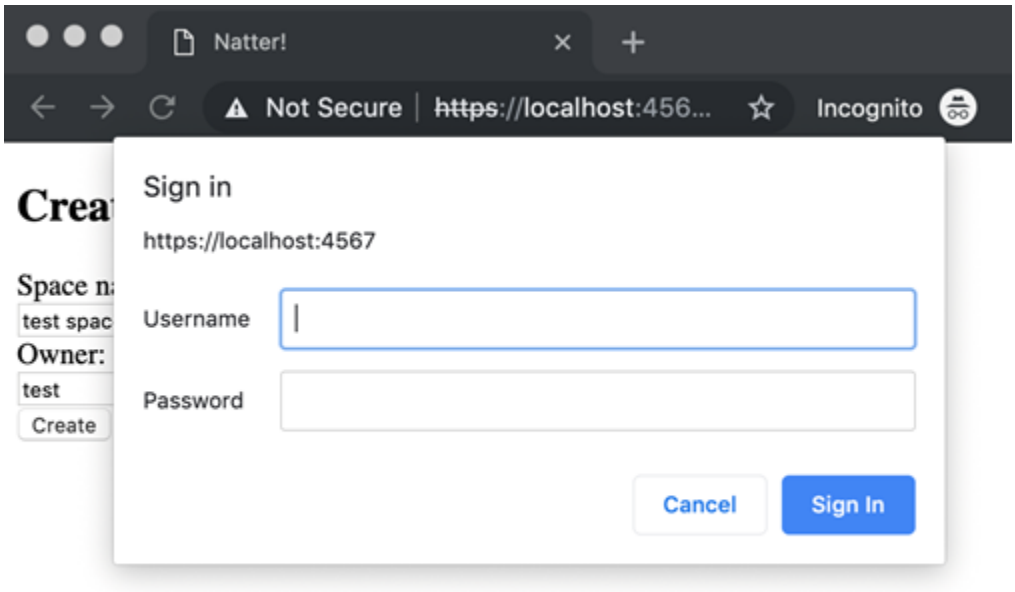


Figure 4.3 Chrome prompt for username and password produced automatically when the API asks for HTTP Basic authentication.