Now that you have an abstract token store, you can write a login endpoint that makes use of the store. Of course, it won't work until you implement a real token store backend, but you'll get to that soon in section 4.3.

As you've already implemented HTTP Basic authentication, you can reuse that functionality to implement token-based login. By registering a new login endpoint and marking it as requiring authentication, using the existing `UserController` filter, the client will be forced to authenticated with HTTP Basic to call the new login endpoint. The user controller will take care of validating the password, so all our new endpoint must do is look up the subject attribute in the request and construct a token based on that information, as shown in figure 4.6.

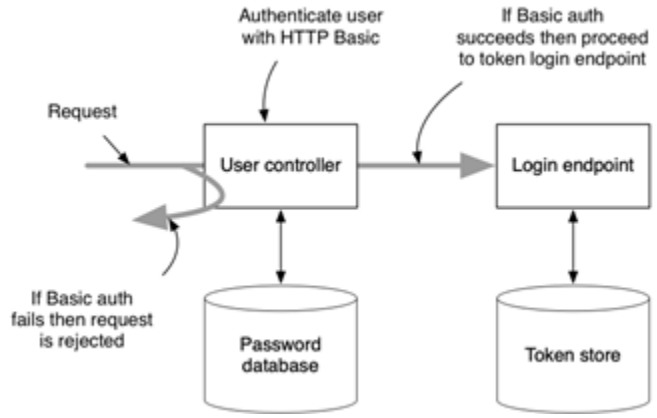


Figure 4.6 The user controller authenticates the user with HTTP Basic authentication as before. If that succeeds then the request continues to the token login endpoint, which can retrieve the authenticated subject from the request attributes. Otherwise, the