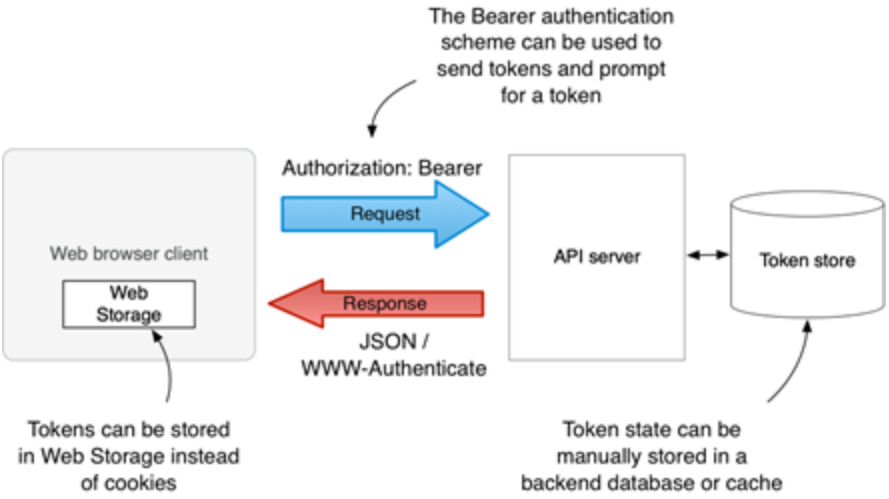


Figure 5.4 Cookies can be replaced by Web Storage for storing tokens on the client. The Bearer authentication scheme provides a standard way to communicate tokens from the client to the API, and a token store can be manually implemented on the backend.

Web Storage is very simple to use, especially when compared with how hard it was to extract a cookie in JavaScript. Browsers that support the Web Storage API, which includes most browsers in current use, add two new fields to the standard JavaScript window object:

- The `sessionStorage` object can be used to store data until the browser window or tab is closed.
- The `localStorage` object stores data until it is explicitly deleted, saving the data even over browser restarts.

Although similar to session cookies, `sessionStorage` is not shared between browser tabs or windows; each tab gets its own storage. Although this can be useful, if you use `sessionStorage` to store authentication tokens then the user