tampered with or faked. We can then define a `SecureTokenStore` that is a sub-type of each of the security properties that we want to enforce. In this case, you want the token controller to use a token store that is both confidential and authenticated. You can then update the `TokenController` to require a `SecureTokenStore`, enforcing that an insecure implementation is not used by mistake.

> **DEFINITION** A ***marker interface*** is an interface that defines no new methods. It is used purely to indicate that the implementation has certain desirable properties.

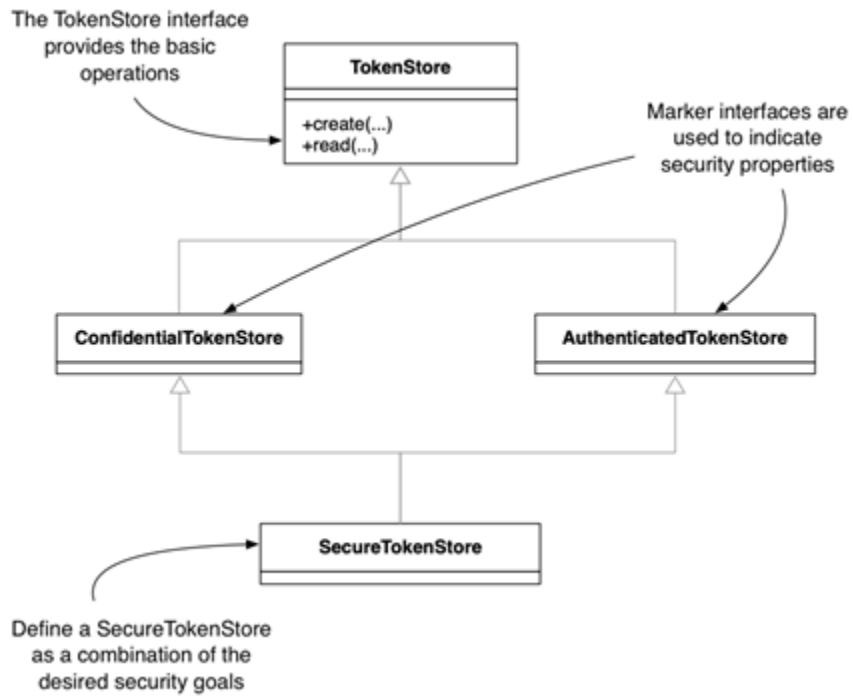


Figure 6.6 You can use marker interfaces to indicate the security properties of your individual token stores. If a store provides only confidentiality, it should implement the ConfidentialTokenStore