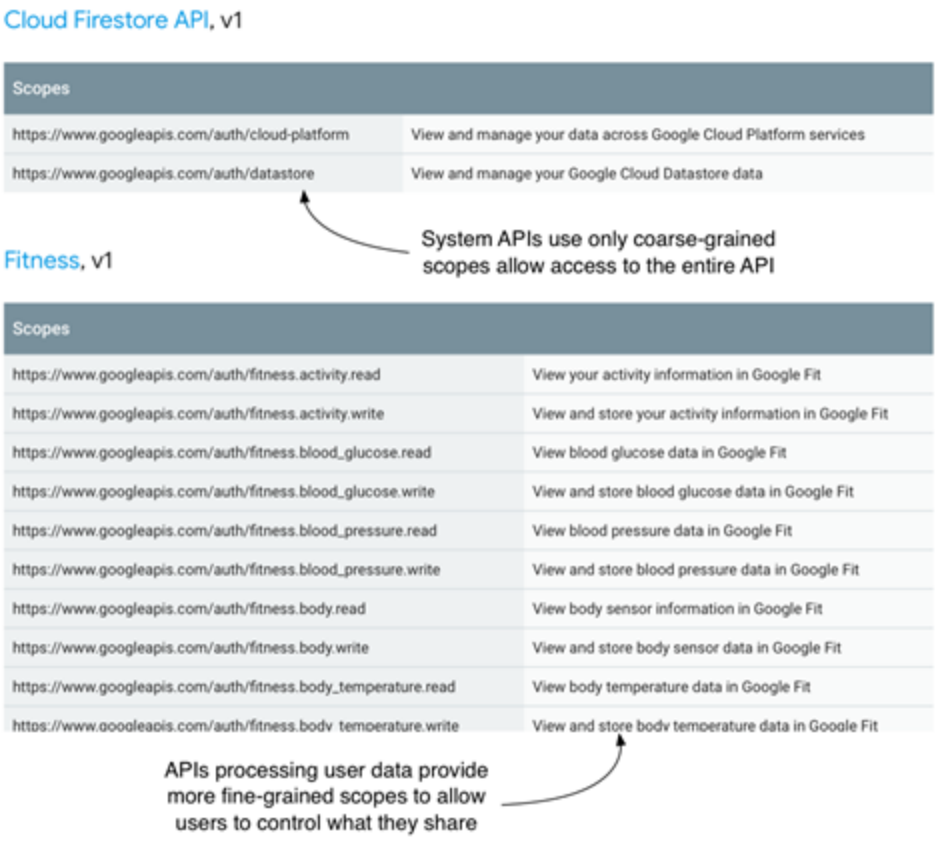


Figure 7.3 Google Cloud Platform OAuth scopes are very coarse-grained for system APIs such as database access or key management. For APIs that process user data, such as the Fitness API, many more scopes are defined, allowing users more control over what they share with third-party apps and services.

Another distinction between how scopes and permissions are used in practice is that scopes are often used to determine which API operations a client can call, while permissions are used to determine which data that call operates on or returns. For example, a client may be granted a `list_files` scope that allows it to call an API operation to list files on a shared drive, but the set of files