#A Construct the token store, pointing at your AS.

You should make sure that the AS and the API have the same users and that the AS communicates the username to the API in the `sub` or `username` fields from the introspection response. Otherwise, the API may not be able to match the username returned from token introspection to entries in its access control lists (chapter 3). In many corporate environments, the users will not be stored in a local database but instead in a shared LDAP directory that is maintained by a company's IT department that both the AS and the API have access to, as shown in figure 7.7.

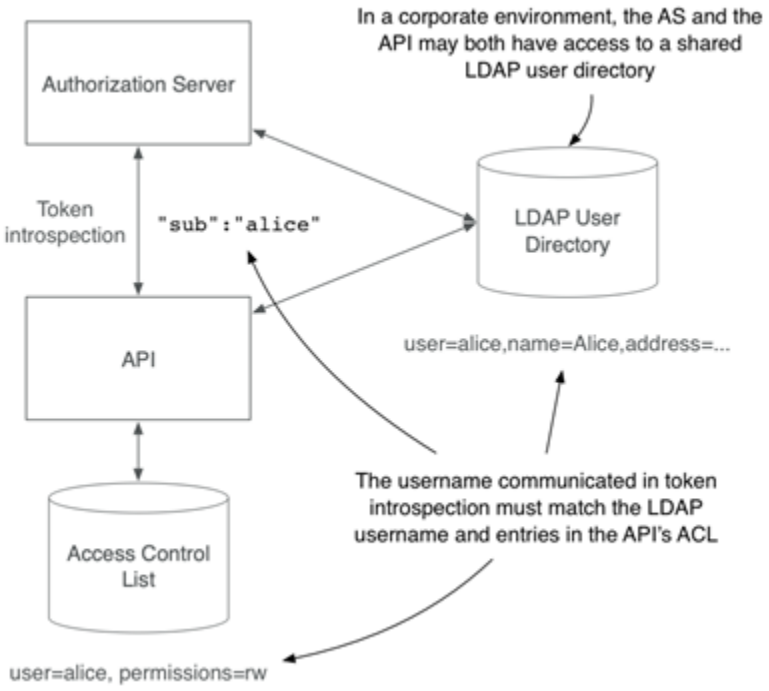


Figure 7.7 In many environments the AS and the API will both have access to a corporate LDAP directory containing details of all users. In this case, the AS needs to communicate the username to the API so