The overall API deployment is shown in figure 2.1. The two APIs are exposed over HTTP and use JSON for message content, for both mobile and web clients. Connections to the shared database use standard SQL over Java's JDBC API.

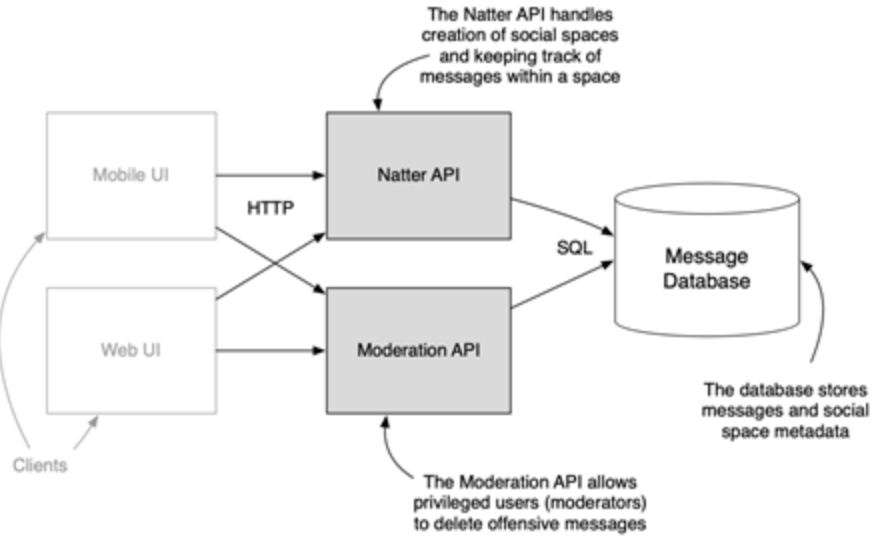


Figure 2.1 Natter exposes two APIs – one for normal users and one for moderators. For simplicity both share the same database. Mobile and web clients communicate with the API using JSON over HTTP, although the APIs communicate with their database using SQL over JDBC.

In this chapter, you will implement just a single operation for creating a new social space by sending a HTTP POST request to the `/spaces` URI on the server. The user that performs this POST operation becomes the owner of the new space. Operations for posting messages to a space and reading messages are left as an exercise. The GitHub repository accompanying the book contains sample implementations of the remaining operations.