history. Non-browser clients would need to manually parse the URI to extract the fragment and send the token on requests, but this is usually straightforward.

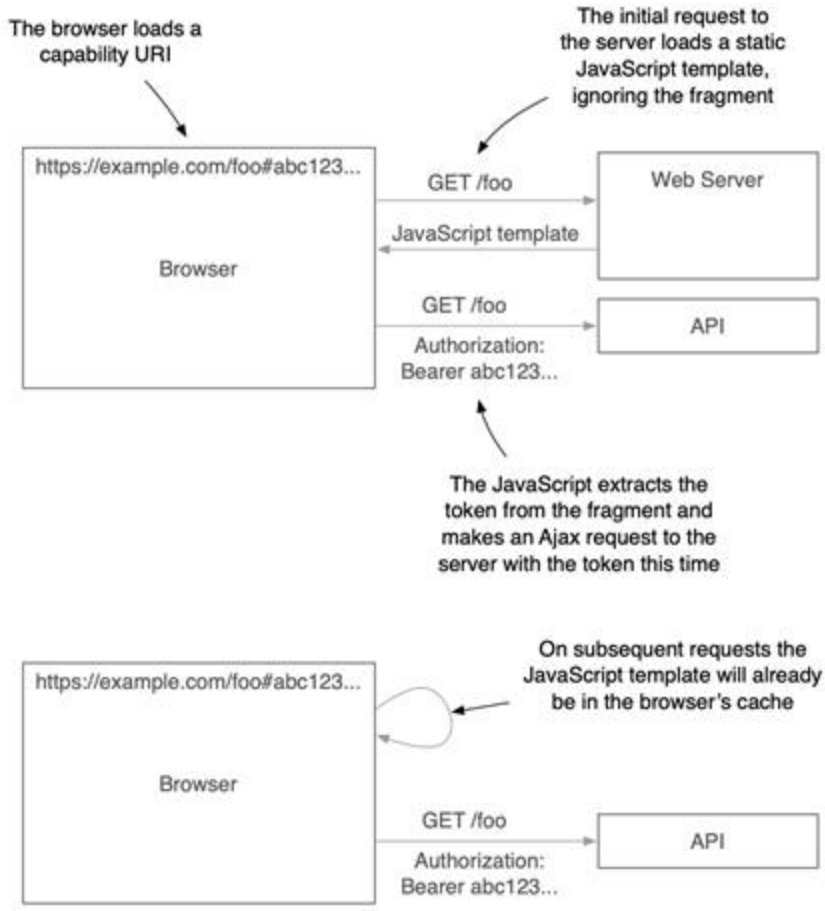


Figure 9.3 In the Waterken web-key design for capability URIs, the token is stored in the fragment of the URI, which is never sent to the server. When a browser loads such a URI it will initially load a static JavaScript page that then extracts the token from the fragment and uses it to make Ajax requests to the API. The JavaScript template can be cached by the