- The main Natter API runs in yet another pod and is exposed as the natter-api-service.

You'll use a single pod for each service in this chapter, for simplicity, but Kubernetes allows you to run multiple copies of a pod on multiple nodes for performance and reliability: if a pod (or node) crashes, it can then redirect requests to another pod implementing the same service.

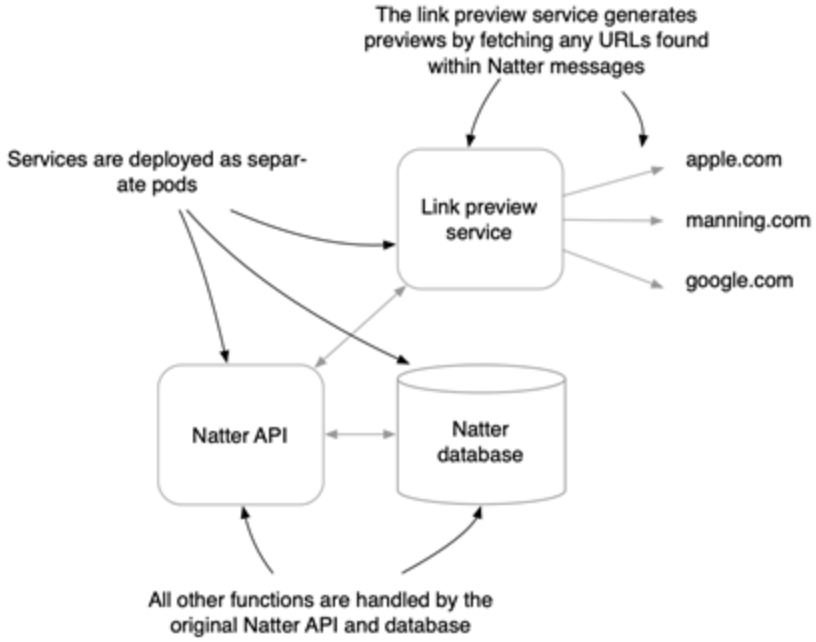


Figure 10.3 The link-preview API is developed and deployed as a new microservice, separate from the main Natter API and running in different pods.

Separating the link-preview service from the main Natter API also has security benefits, because fetching and parsing arbitrary content from the internet is potentially risky. If this was done within the main Natter API process, then any mishandling of those requests could compromise user data or messages. Later in the chapter you'll see examples of