when a user creates a new social space, and Spark will pass in a `Request` and a `Response` object that you can use to implement the operation and produce a response.

The code follows the general pattern of many API operations.

1. First, we parse the input and extract variables of interest.
2. Then we start a database transaction and perform any actions or queries requested.
3. Finally, we prepare a response, as shown in figure 2.3.

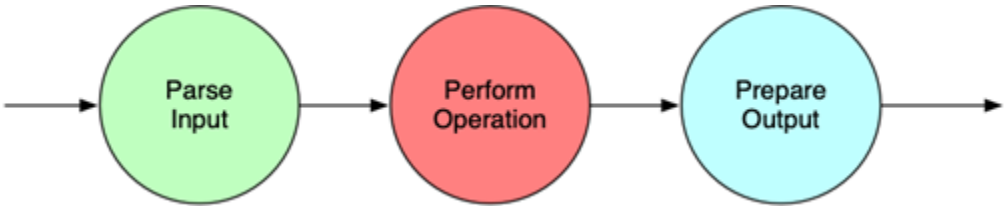


Figure 2.3 An API operation can generally be separated into three phases: first we parse the input and extract variables of interest, then we perform the actual operation, and finally we prepare some output that indicates the status of the operation.

In this case, you'll use the json.org library to parse the request body as JSON and extract the name and owner of the new space. You'll then use Dalesbred to start a transaction against the database and create the new space by inserting a new row into the `spaces` database table. Finally, if all was successful, you'll create a 201 Created response with some JSON describing the newly created space. As is