forward on the plain HTTP request to the target service. To make this work, the service mesh runs a central CA service that distributes certificates to the proxies. Because the service mesh is aware of Kubernetes service metadata, it automatically generates correct certificates for each service and can periodically reissue them[4].

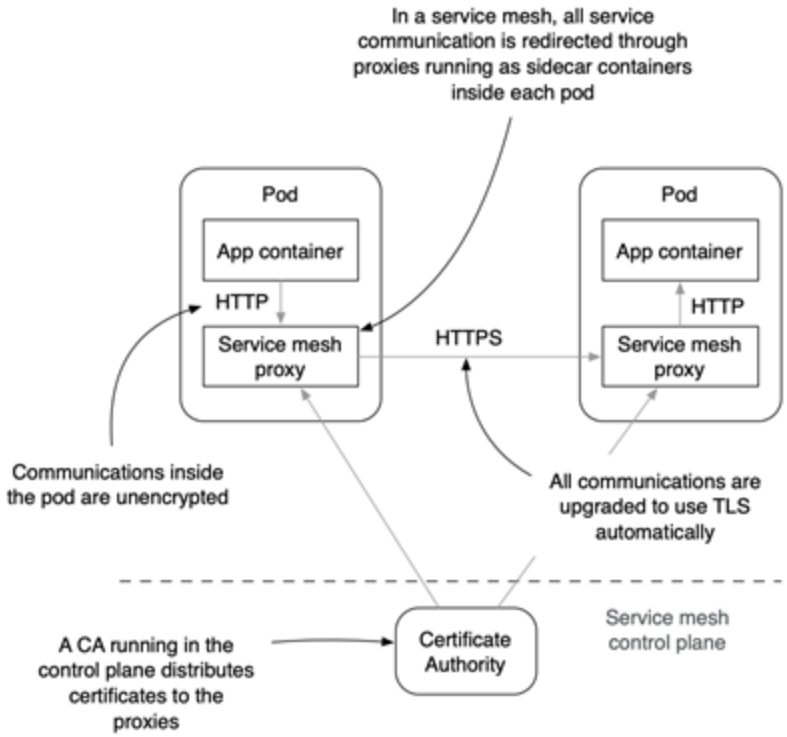


Figure 10.6 In a service mesh a proxy is injected into each pod as a sidecar container. All requests to and from the other containers in the pod are redirected through the proxy. The proxy upgrades communications to use TLS using certificates it obtains from a CA running in the service-mesh control plane.

To enable a service mesh, you need to install the service-mesh *control plane* components such as the CA into your