or not. Check the `ssl-client-verify` header to make sure.

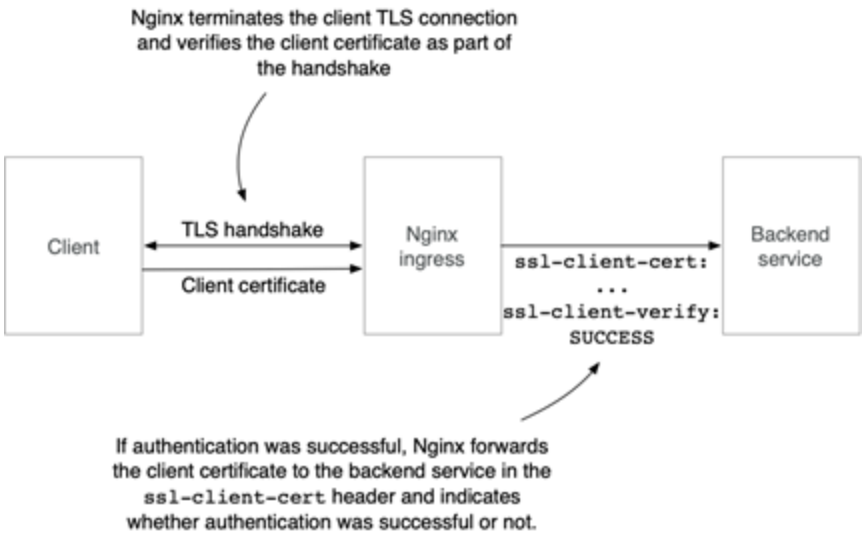


Figure 11.5 To allow client certificate authentication by external clients you configure the Nginx ingress controller to request and verify the client certificate during the TLS handshake. Nginx then forwards the client certificate in the ssl-client-cert HTTP header.

The `mkcert` utility that you'll use for development in this chapter sets the client name that you specify as a Subject Alternative Name (SAN) extension on the certificate rather than using the Subject DN field. Because Nginx doesn't expose SAN values directly in a header, you'll need to parse the full certificate to extract it. Listing 11.5 shows how to parse the header supplied by Nginx into a `java.security.cert.X509Certificate` object using a `CertificateFactory`, from which you can then extract the client identifier from the SAN. Open the UserController.java file and add the new method from listing 11.5.