token as normal. The API introspects the token by calling the AS token introspection endpoint (chapter 7), which will return the `cnf` claim along with the other token details. The API can then compare the hash value in this claim to the client certificate associated with the TLS session from the client.

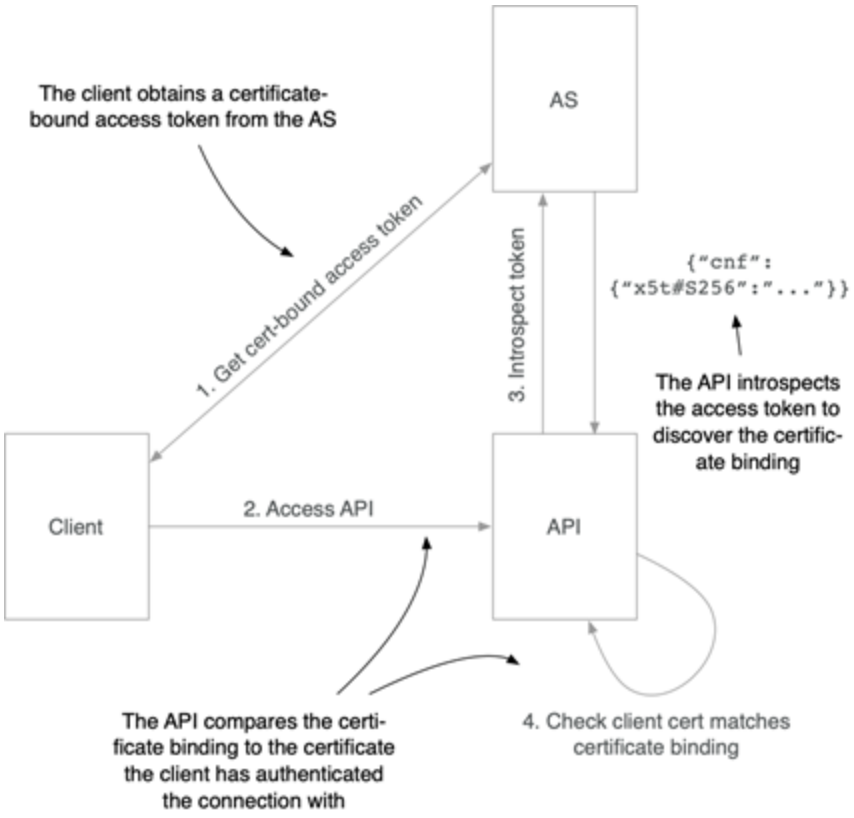


Figure 11.7 When a client obtains a certificate-bound access token and then uses it to access an API, the API can discover the certificate binding using token introspection. The introspection response will contain a "cnf" claim containing a hash of the client certificate. The API can then compare the hash to the certificate the client has used to authenticate the TLS