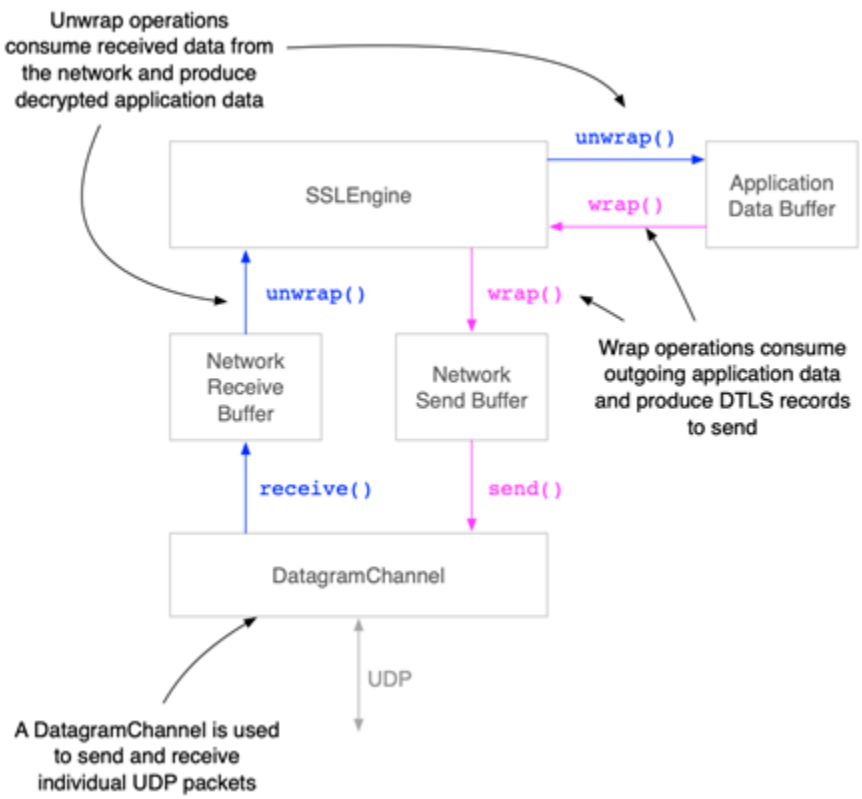


Figure 12.2 The SSLEngine uses two methods to move data between the application and network buffers: wrap() consumes application data to send and writes DTLS packets into the send buffer, while unwrap() consumes data from the receive buffer and writes unencrypted application data back into the application buffer.

To start the DTLS handshake, call `sslEngine.beginHandshake()`. Rather than blocking until the handshake is complete, this configures the engine to expect a new DTLS handshake to begin: Your application code is then responsible for polling the engine to determine the next action to take and sending or receiving UDP messages as indicated by the engine.