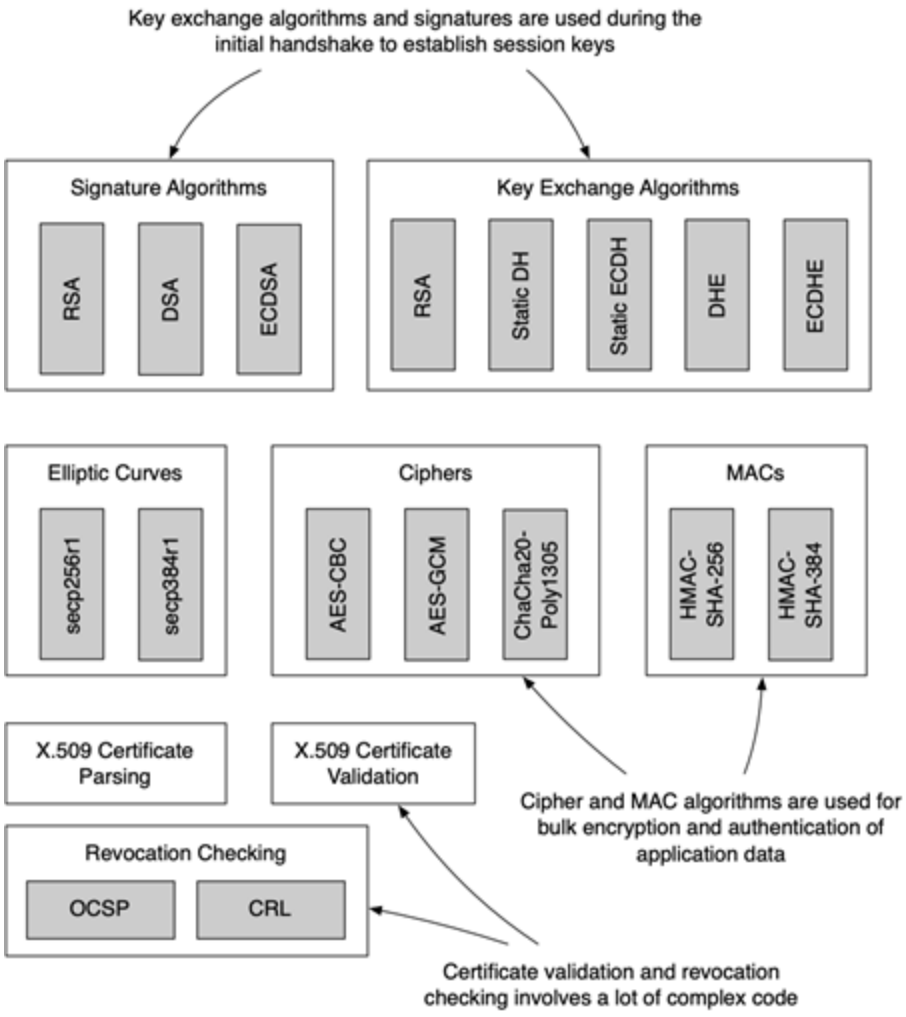


Figure 12.4 A cross-section of algorithms and components that must be implemented to support common TLS web connections. Key exchange and signature algorithms are used during the initial handshake, and then cipher modes and MACs are used to secure application data once a session has been established. X.509 certificates require a lot of complex code for parsing, validation, and checking for revoked certificates.

For these reasons, other cipher suites are often popular in IoT applications. As an alternative to forward secret cipher