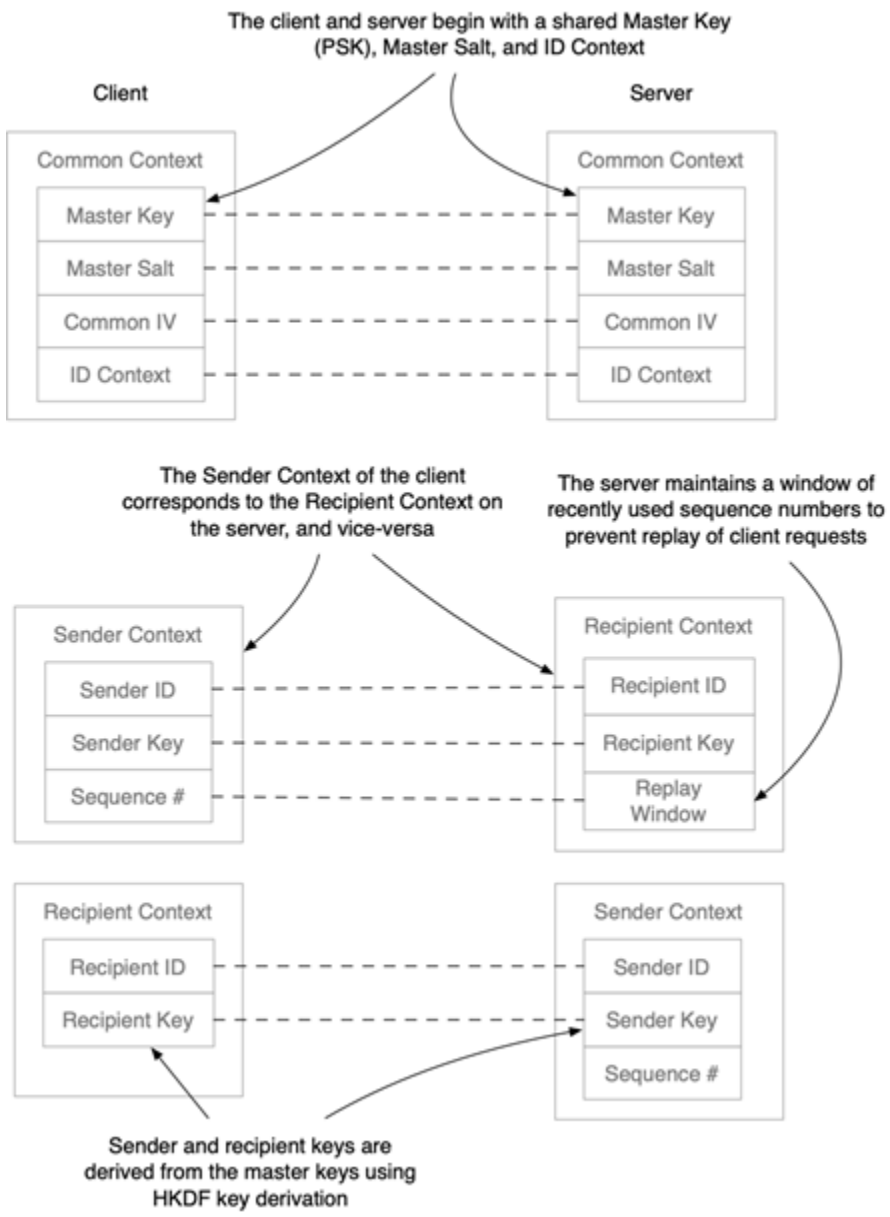


Figure 13.4 The OSCORE context is maintained by the client and server and consists of three parts: a common context contains a master key, master salt, and common IV component. Sender and recipient contexts are derived from this common context and IDs for the sender and recipient. The context on the server mirrors that on the client, and vice-versa.