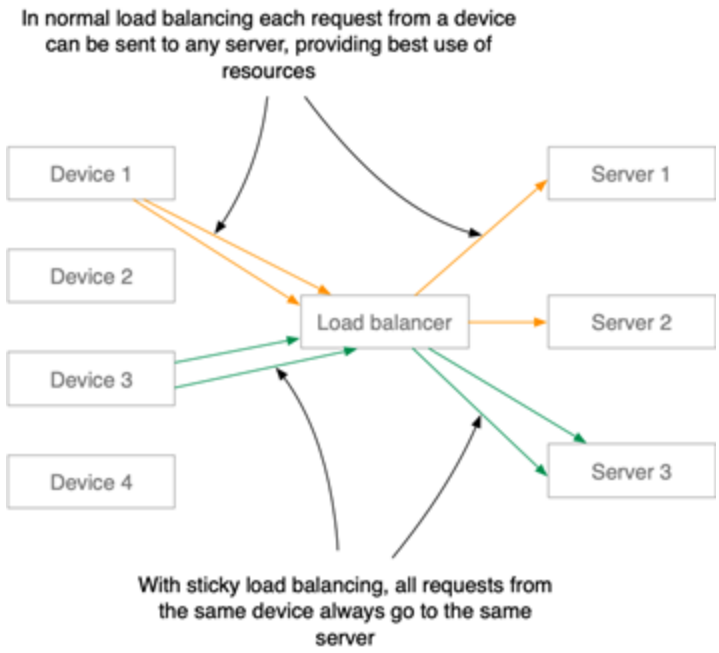


Figure 13.5 In sticky load balancing all requests from one device are always handled by the same server. This simplifies state management but reduces scalability and can cause problems if that server restarts or is removed from the cluster.

13.2.2 Avoiding replay in REST APIs

All solutions to message replay involve the client and server maintaining some state. However, in some cases you can avoid the need for per-client state to prevent replay. For example, requests which only read data are harmless if replayed, so long as they do not require significant processing on the server and the responses are kept confidential. Some requests that perform operations are also harmless to replay if the request is *idempotent*.