counter or timestamp in the ETag calculation so that the ETag is always different even if the content is the same.

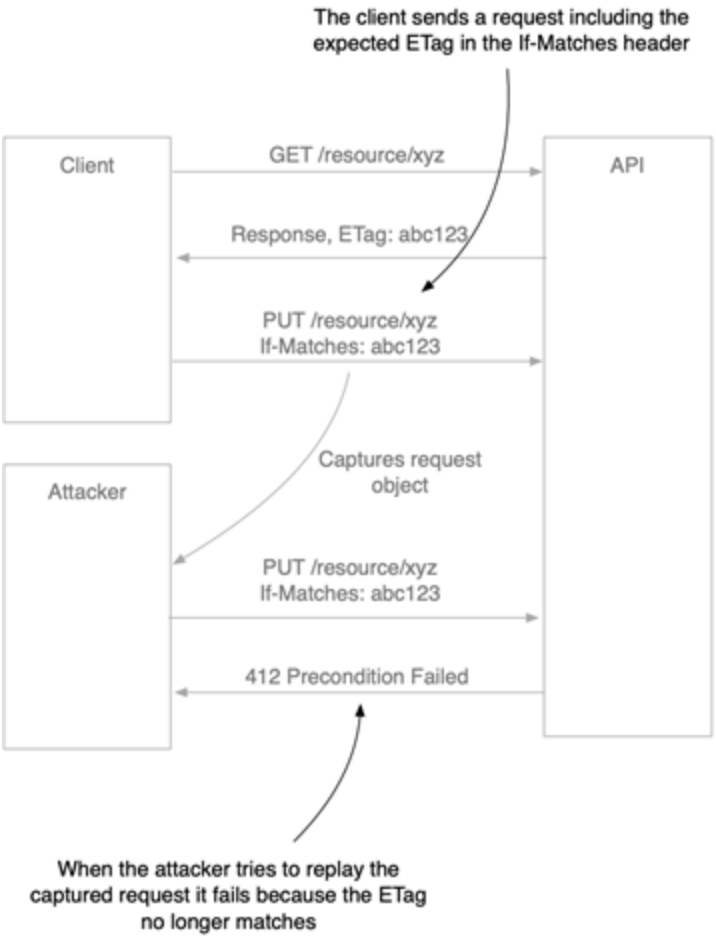


Figure 13.6 A client can prevent replay of authenticated request objects by including an If-Matches header with the expected ETag of the resource. The update will modify the resource and cause the ETag to change, so if an attacker tries to replay the request it will fail with a 412 Precondition Failed error.