limited to just the operations needed to access that device. For example, a user can be sent a one-time code that they can display on their smartphone as a QR code that the smart locker can scan. The same code is hashed and sent to the device, which can then compare the hash to the QR code and if they match it opens the locker, as shown in figure 13.9.

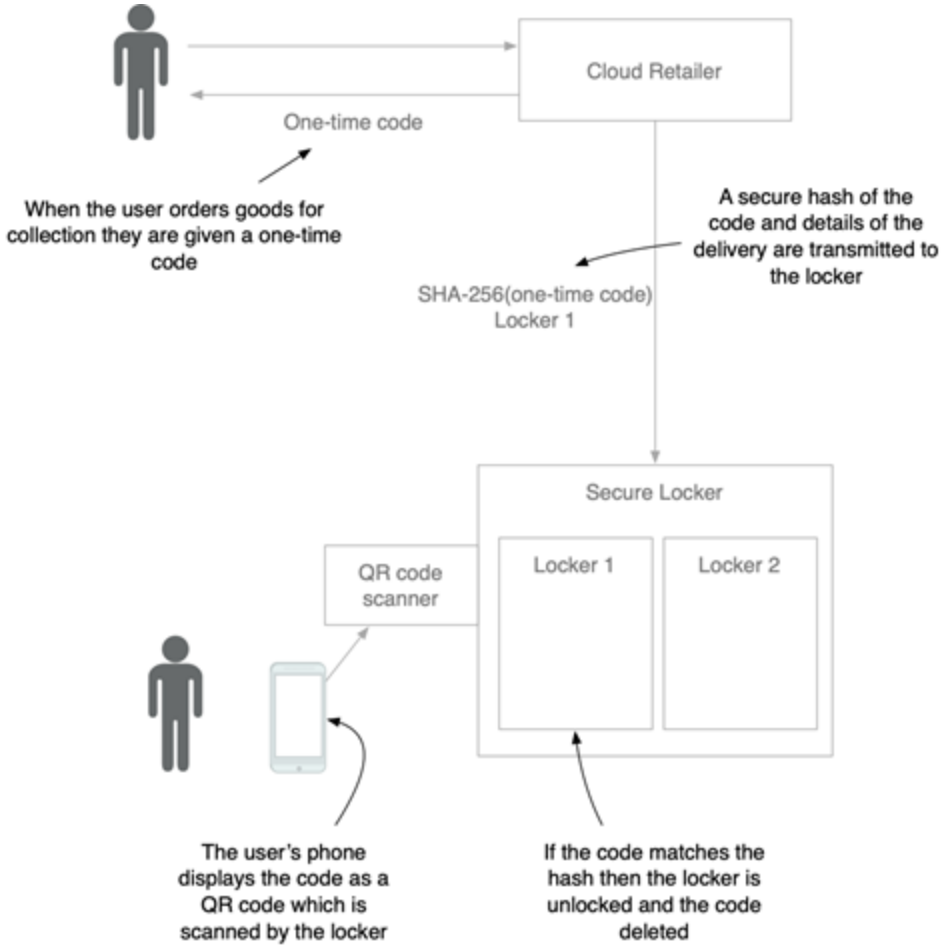


Figure 13.9 One-time codes can be periodically sent to an IoT device such as a secure locker. A secure hash of the code is stored locally allowing the locker