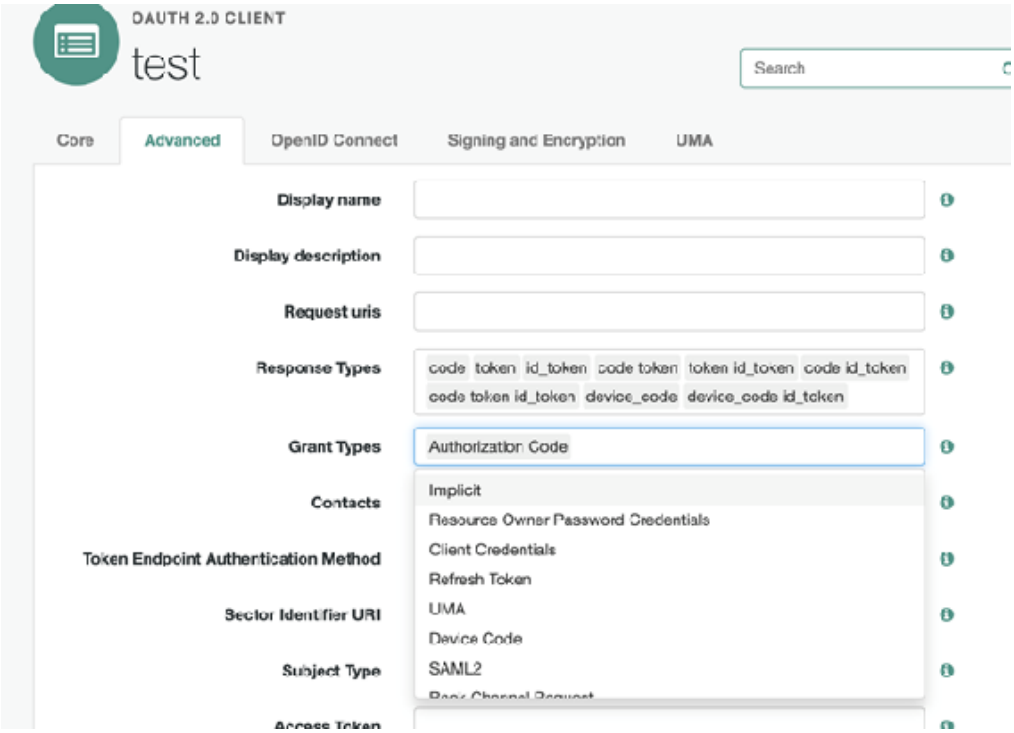


Figure A.5 Click on the Advanced tab and then in the Grant Types field to configure the allowed grant types for the client.

You can check that everything is working by getting an access token for the client by running the following curl command in a terminal:

```
curl -d 'grant_type=client_credentials&scope=openid' \
  -
u test:password http://as.example.com:8080/oauth2/access_toke
n
```

You'll see output like the following:

```
{"access_token":"MmZl6jRhMoZn8ZNOXUAa9RPikL8","scope":"openid"
,"id_token":"eyJ0eXAiOiJKV1QiLCJraWQiOiJ3VTNpZklJYUxPVUFSZVJCL
```