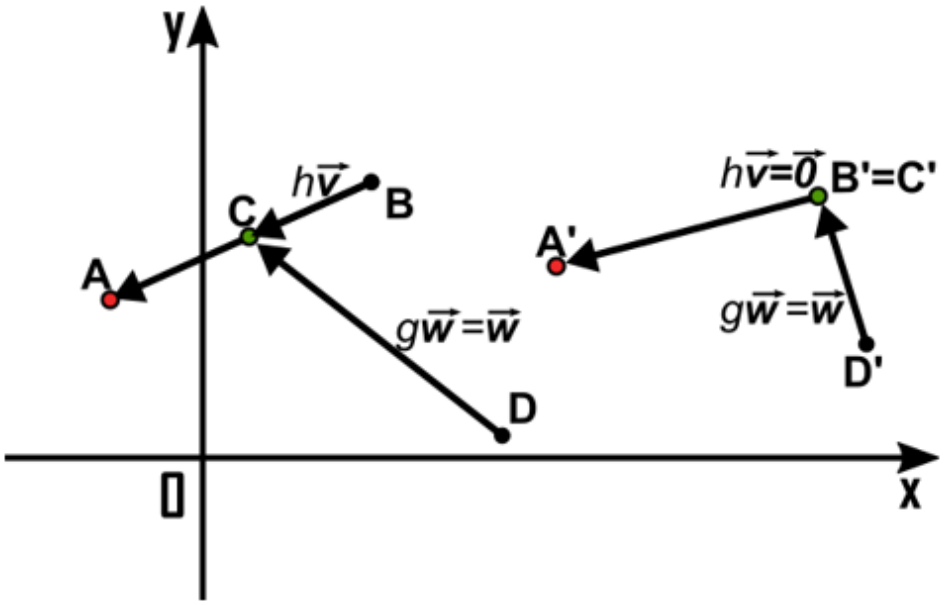


**Figure 15.20 Two edge cases for the vectorial method. In the first case, segments `AB` and `CD`, we have `0≤h≤1` and `g==1`: vertex `C` lies on the segment `AB`.
The second example, segments `A'B'` and `C'D'`, has `h==0` and `g==1`: in this case, two of the endpoints must be the same, and in fact `B'==C'`.**

Listing 15.8 shows the code to compute the scaling coefficient (either of `h` or `g`, which one depends on the order of the points we pass) for one segment with respect to the other; we reuse this coefficient in listing 15.9, where we check the intersection between two graph edges.

Listing 15.9 Method segmentIntersection

```
function segmentIntersection(e1, e2)
         #1
  h = vectorScalingFactor(
      e1.source, e1.destination, e2.source,
e2.destination)          #2
```