span. Sometimes outliers, though, end up being more confusing than useful, so in this example we will not use them.

At this point it should look like a piece of cake, right?

We can do it in many ways, but my personal favorite is displaying some plots in a Jupyter notebook: take a look here at an example[27] - isn't it great that GitHub lets you already display the notebook without having to run it locally?

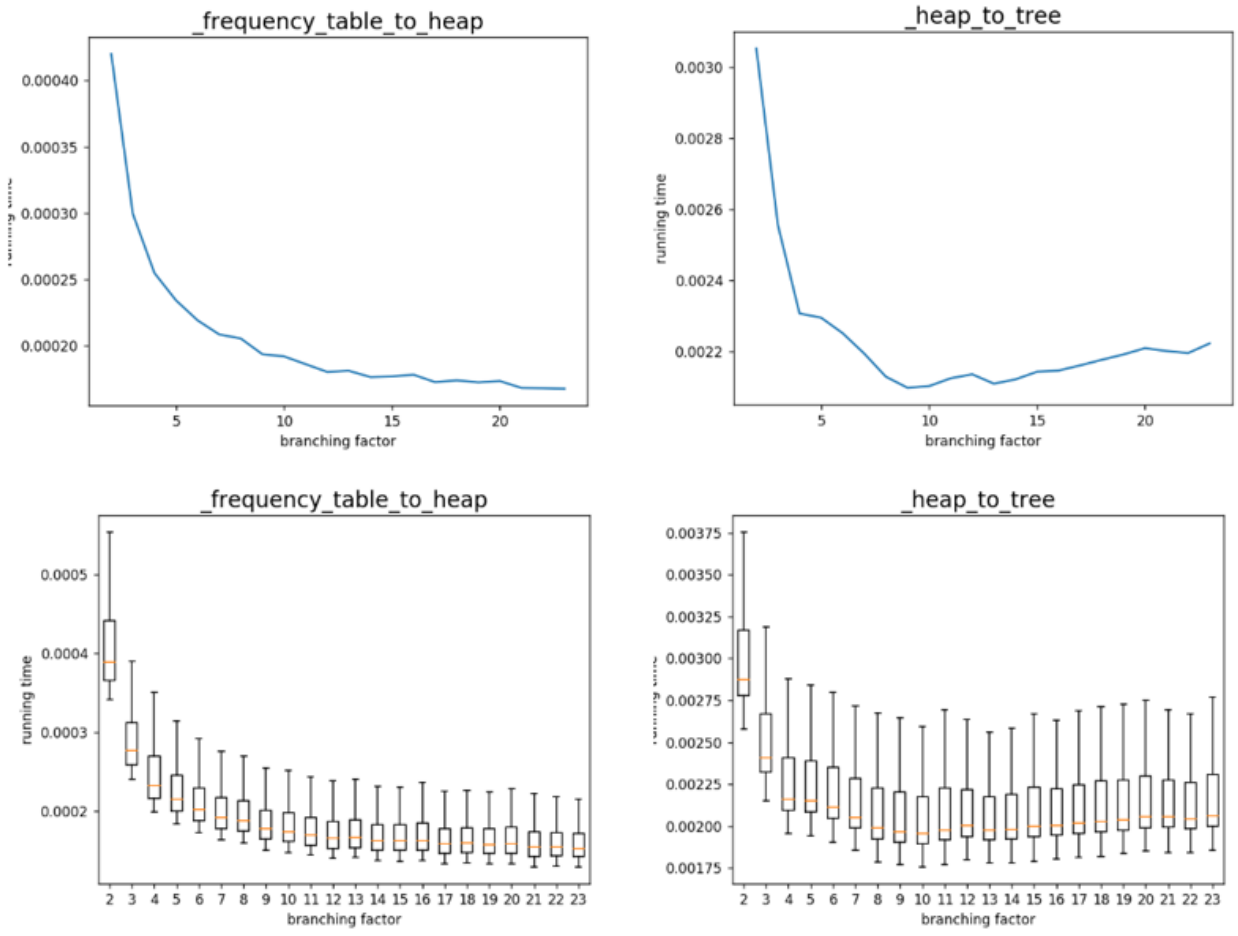


Figure 2.20 The distribution of running times for the two high level functions in huffman.py using a heap: (above): mean running time by branching factor.