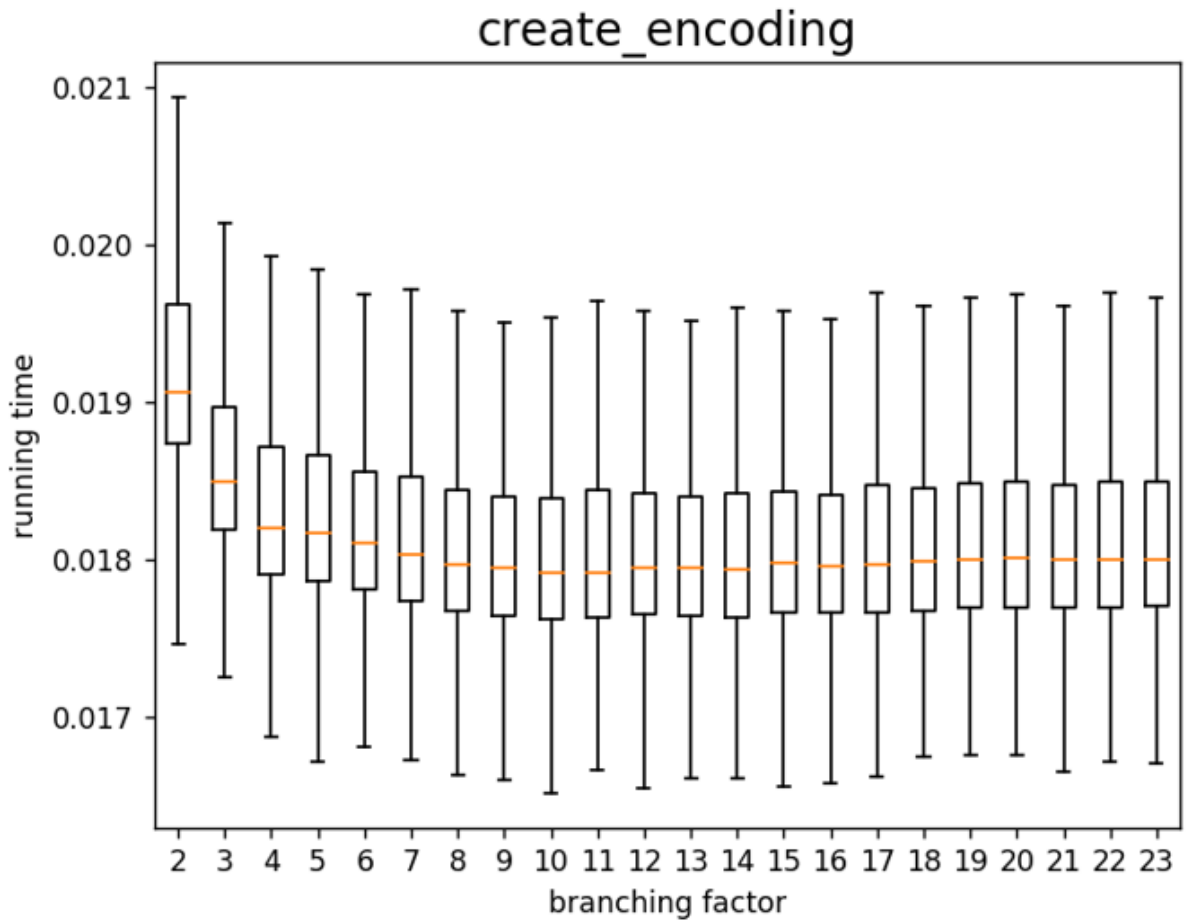


Figure 2.26 Distribution of per-call running time for method `huffman.create_encoding`.

You can check out the full results, including the other examples, on the notebook on GitHub. Keep in mind that this analysis uses a limited input, and as such is likely to be biased: this is just a starting point, I highly encourage you to try running a more thorough profiling using more runs on different inputs.

You can also pull the full profiling and visualization code, and delve even deeper into the analysis.

To wrap up, I'd like to highlight a few takeaways: