up to $h_{(k-1)}(key)$, and set those bits to 1.

When we look-up for an entry, we also need to compute the k hashes for it like described for `insert`, but this time we check the k bits at the indices returned by the hash functions, and return `true` if and only if all bits at those positions are set to 1.

Figure 4.3 shows both operations in action.

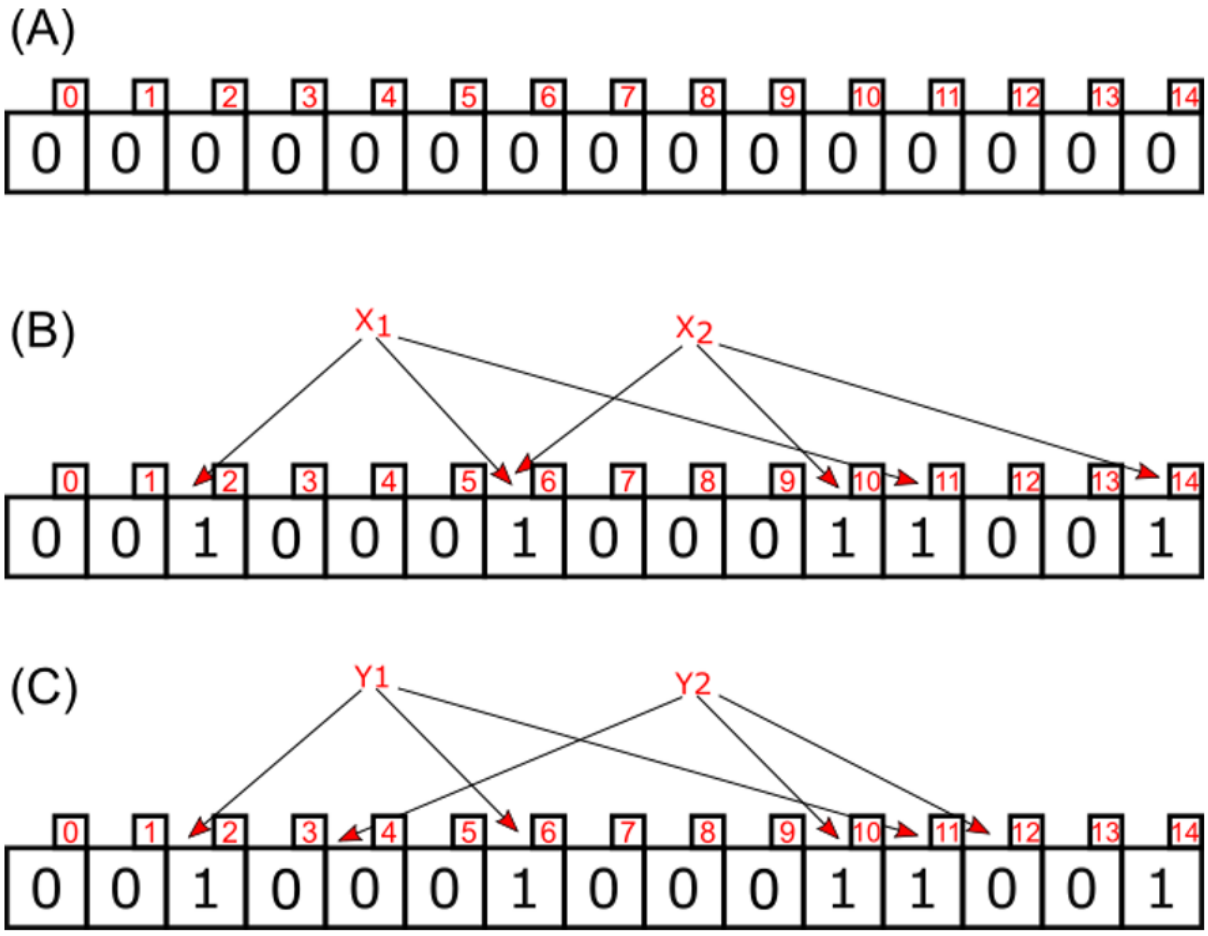


Figure 4.3 An example of a Bloom filter.
(A) Initially the filter is an array of zeroes.
(B) To store an item x_i, it is hashed k times (in the example, k=3), with each hash yielding the index of a