Now that we have taken care of initializing our disjoint-set, we can provide a couple of useful methods. For example, we can add a `size` public property, simply defined as the number of entries stored in the local partitions map.

You can find examples of such methods implemented in our repo; here, instead, we will focus on the main API methods, starting with the `add` method, illustrated in figure 5.6, whose pseudo-code is shown in listing 5.2.

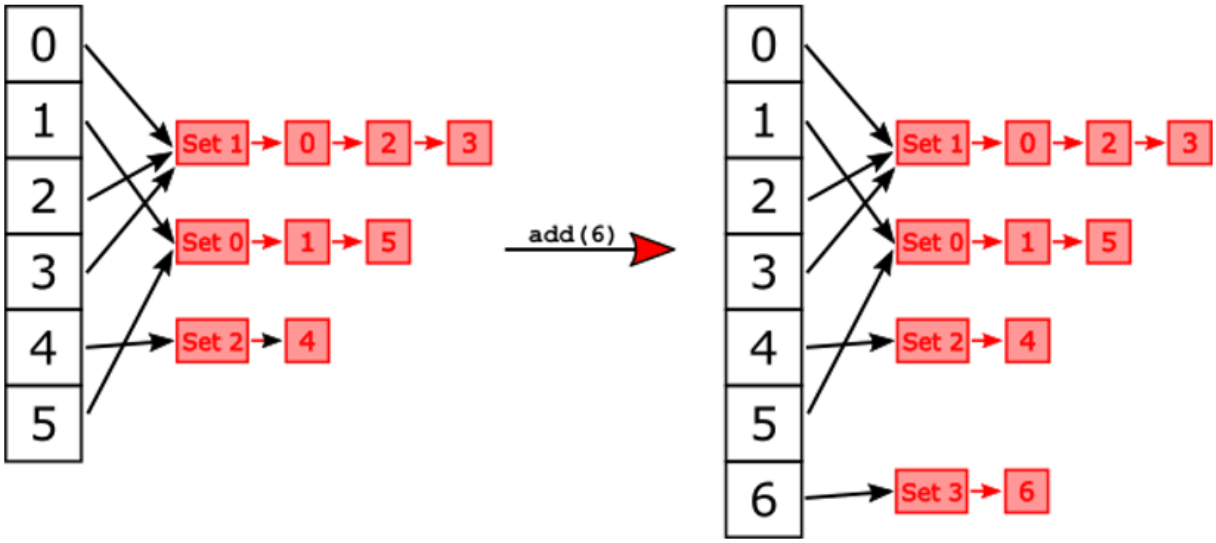


Figure 5.6 Adding a new element to the container. Provided the new element is not a duplicate of any element currently in our container, we can add it by creating a new singleton partition, which will only contain the newly added element.

This method is used to allow the *Universe* to grow, with new (unique) elements that can be added at any time: every time we add a new element, we just add a brand-new partition containing that element alone. But, of course, we need to check that the argument passed to `add` is well-defined, so