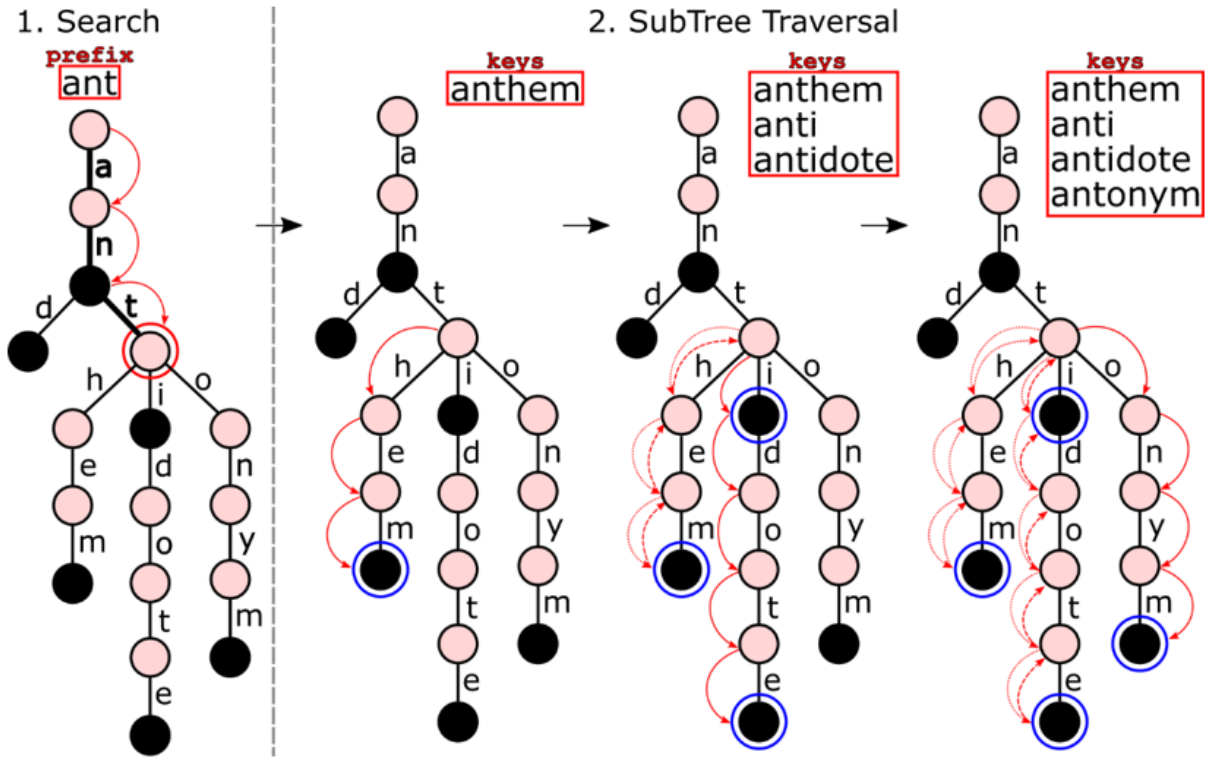


Figure 6.10 An example of method `keysWithPrefix`:
1. Traverse the path corresponding to the common prefix;
2. Collect all keys found traversing the subtree at the end of the path for `prefix`.

The most efficient way to accumulate the keys found would be to pass a third parameter to the method, an accumulator, to which we would add all keys only once and in one place, line #3.

Under this assumption, the running time for method `allKeys` is `O(j)`, for a trie with `j` nodes, and therefore the worst-case upper bound for the method `keysStartingWith` is `O(m+j)`, for a trie with `j` nodes, and a prefix with `m` characters.