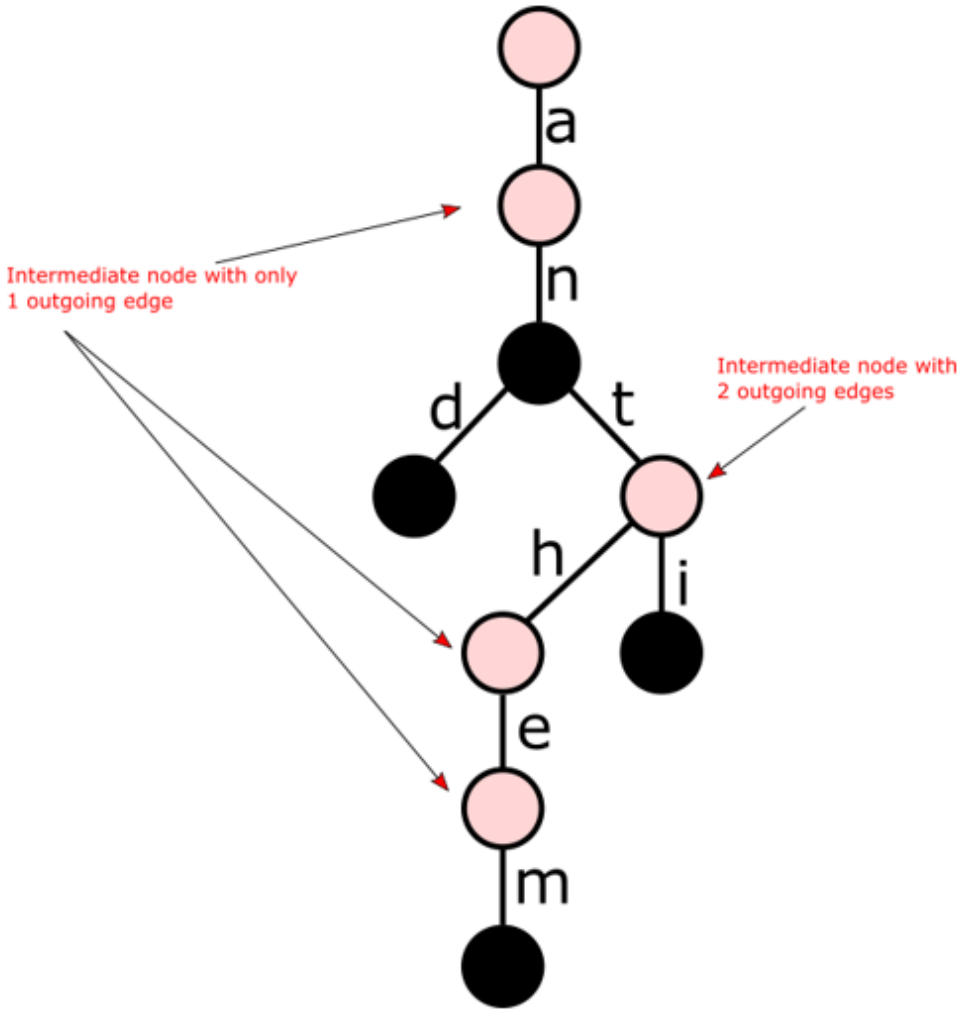


Figure 6.11 intermediate nodes in tries have 1 or more outgoing edges (assuming we implemented pruning after `delete`). Do you see any difference?

Key nodes also store information, independently on the number of children they have: they tell us that the path to reach them composes a string that is stored in the trie.

If, however, an intermediate node, which stores no key, only has one child, then it carries no relevant information per se, it’s only a forced step in the path.