could be labeled with a substring that matches more than one character of our argument s.

One important property in these trees is that no two outgoing edges of the same node share a common prefix. This is crucial and allows us to store and check edges more efficiently.

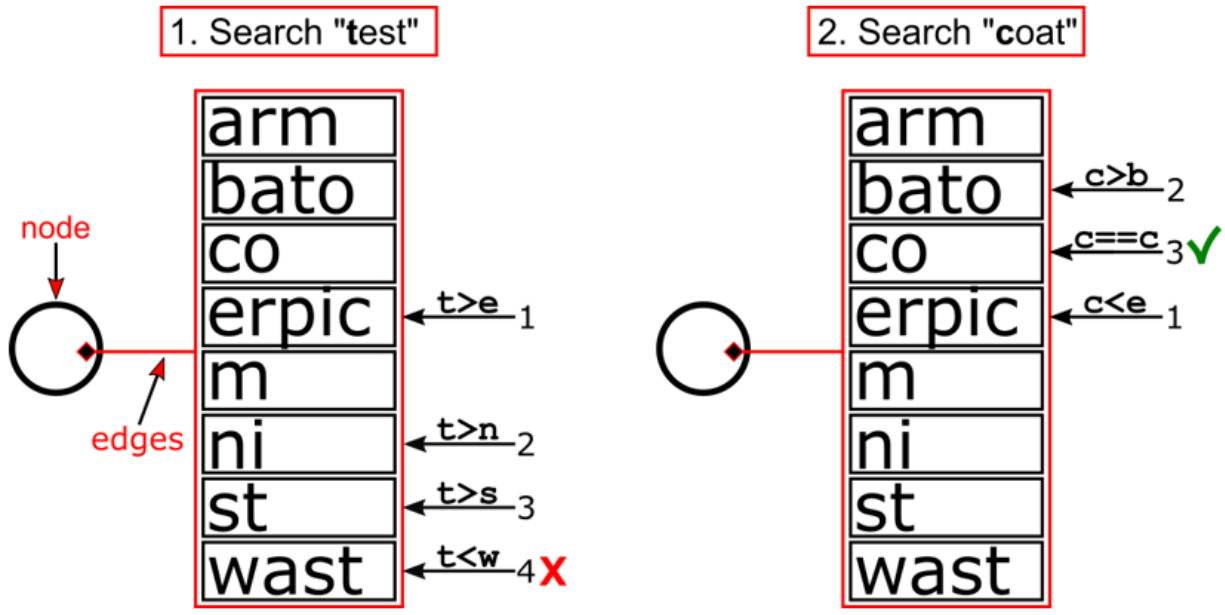


Figure 6.13 An example of a radix trie node with edges stored as in sorted array.
(left) A failed binary search.
(right) A successful search. Comparisons are performed on the first character only of the two strings: in the successful search, though, the edge label is a prefix of the searched string.

A first solution is keeping edges in sorted order, and use binary search to look for a link that starts with the next character c in the key: since there can’t be two edges starting with c, if we find one we can compare the rest of the