prefix. The difference between the two cases is illustrated in figure 6.21.

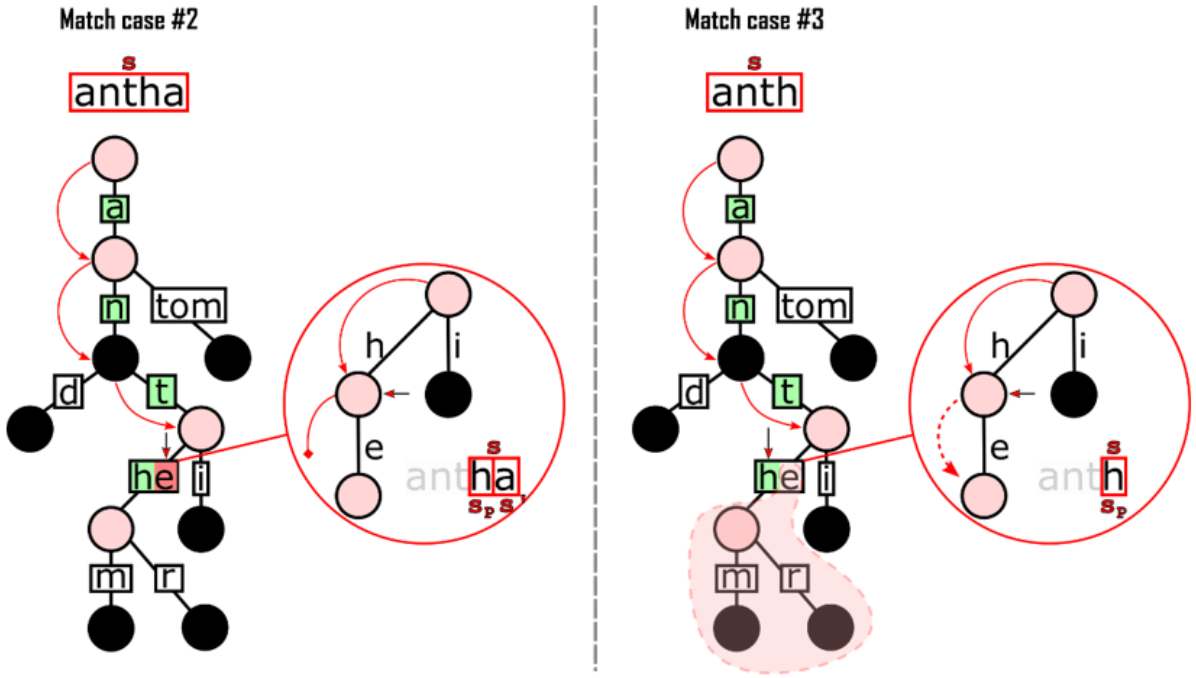


Figure 6.21 The difference in facing match cases #2 and #3 while looking for the node matching the shorter string including a prefix.
(left) When we face case #2, it means that the next edge doesn't match all the characters in the string fragment left: therefore, in the corresponding trie, `searchNode(s)` would return `null`.
(right) With case #3, we have a full match of the string fragment, that however ends in the middle of an edge. In the corresponding trie, the search would return an intermediate node, in particular a pass-through node: therefore, since no keys are stored in pass-through nodes, we can equivalently start enumerating keys from the first non-pass-through among its descendants.