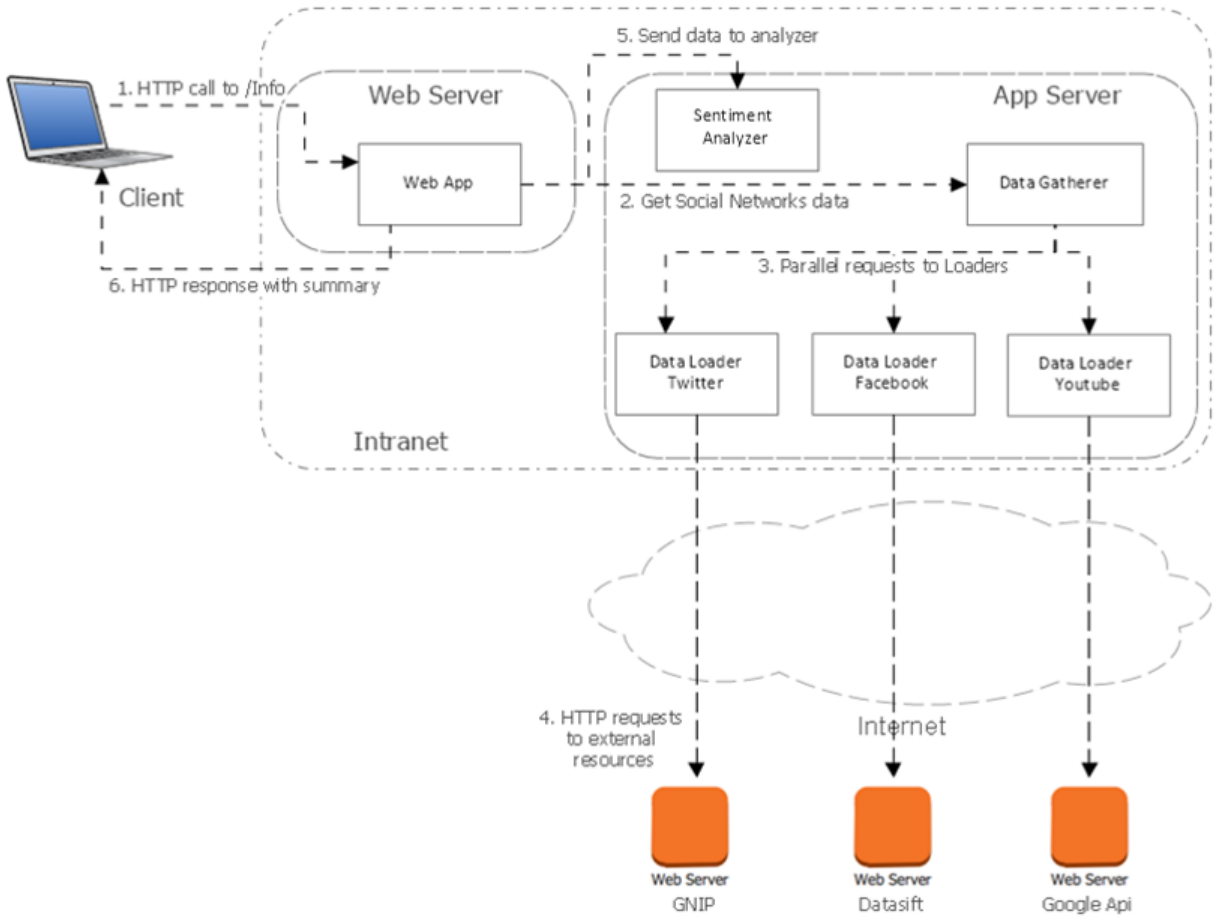


Figure 7.1 A possible architecture for the "Get social networks daily summary" application.

1. The client sends an HTTP call to the web server asking for the daily summary (for a specific company).

2. The web server contacts the app server to get the data from the major social networks (here the list is just meant as an example. The app server might be physically and logically on the same machine as the web server (in which case the call is a method call), or physically hosted on the same machine but in a different process, or even hosted in a different machine, such that the call ends up being an actual HTTP call.

3. The data gatherer starts one new thread for each