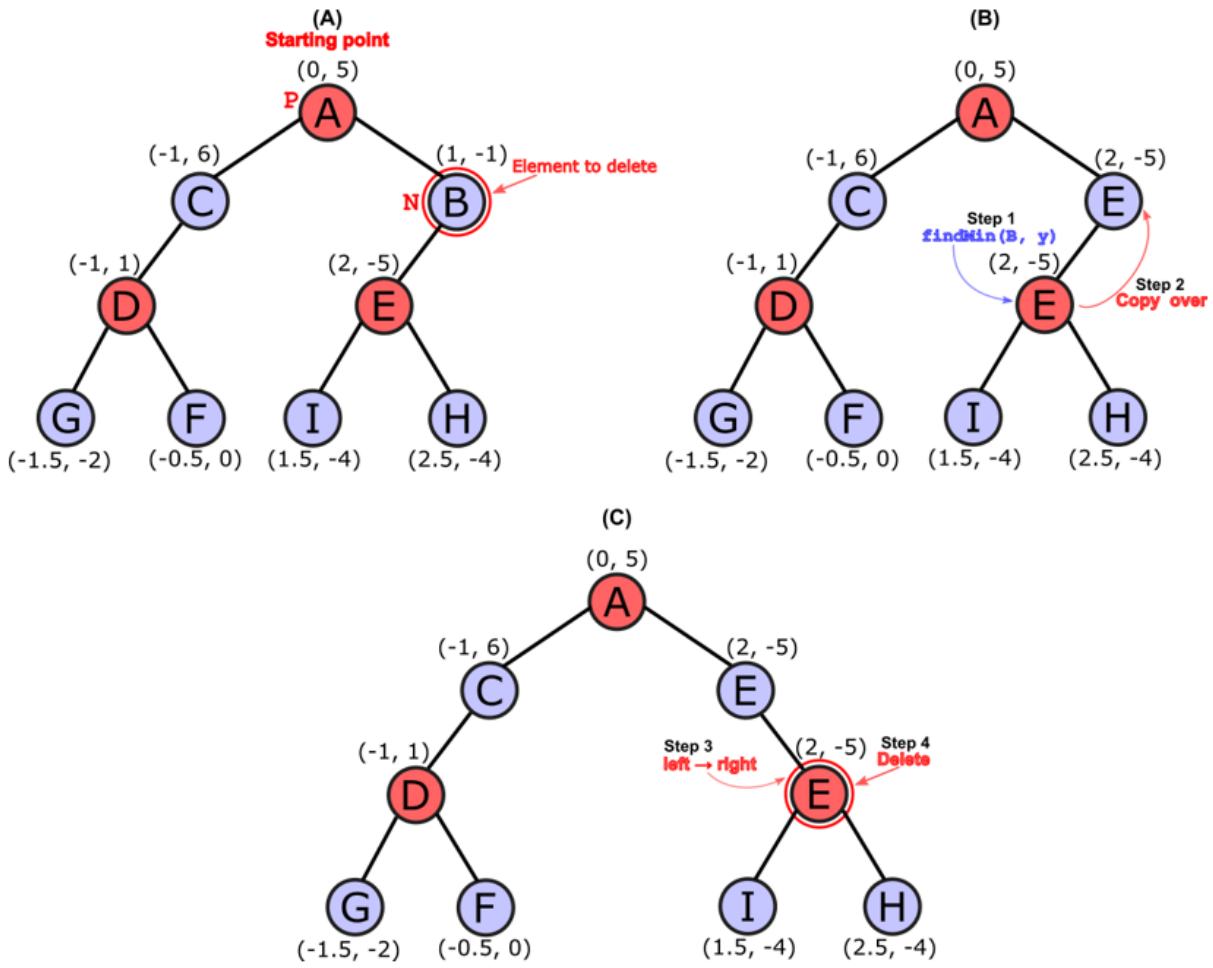


Figure 9.19 Correct steps for deleting a node `N` with only a left child. In figure 9.18 we have seen that finding the max of the left branch won't work. Instead, we need to find the min `M`, use it to replace the deleted node, and then set `N`'s old left branch as the new node's right branch. Then we only need to remove `M` from the left branch, which requires a new call to remove (as you can see, unfortunately we can make no assumptions on this call, it might cascade and require more recursive calls to remove).

The worst case here is the latter: we don't know where the minimum node will be in its branch, it could be far down the