As listing 2.2 shows, we keep swapping elements until either current element gets assigned to the root (line #3), or it's smaller than its next ancestor (line #5-#7).
This means that each call to this method can involve at most `logD(n)` comparisons and exchanges, because it's upper-bounded by the height of the heap.

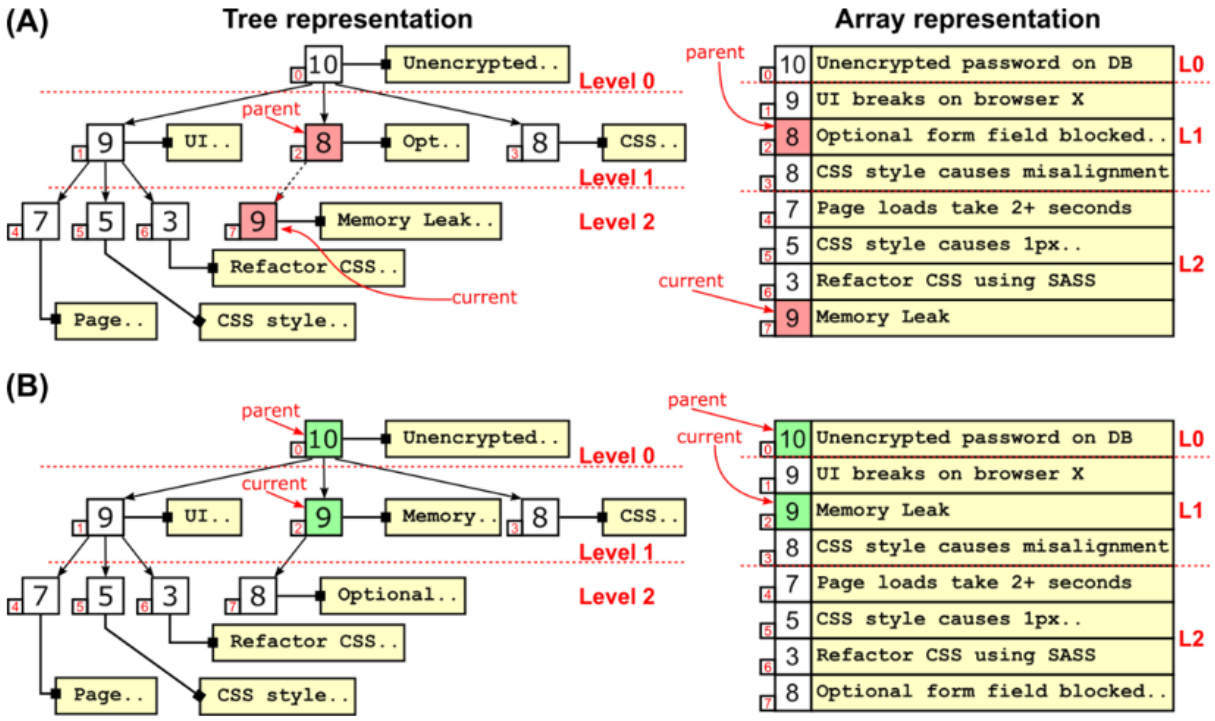


Figure 2.6 The `bubbleUp` method in action on a ternary max-heap.
(A) The element at index `7` has a higher priority (9) than its parent (whose priority is 8).
(B) We swap element at index `7` with its parent at index `2`. The element now at index 8 has certainly found its final position, while the one bubbled up